




## SPECIFICATIONS

XERO  
TECHNOLOGY  
ADVANCED




### XTA | 2.0 Square

metric	84mm Wide x 90mm High
--------	-----------------------

imperial	2" Wide x 3.54" High
----------	----------------------



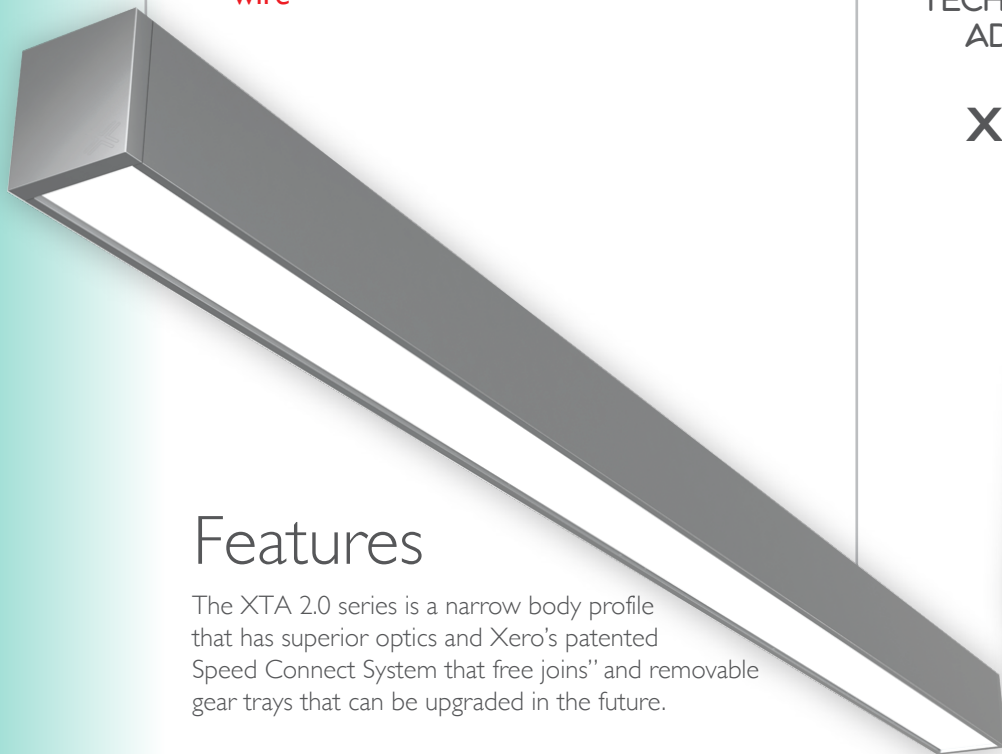

add suspension wire





# XTA | 2.0 Square

indoor series IP20

metric	84mm Wide x 90mm High
imperial	2" Wide x 3.54" High

## Features

The XTA 2.0 series is a narrow body profile that has superior optics and Xero's patented Speed Connect System that free joins" and removable gear trays that can be upgraded in the future.



## Benefits

Xero's Xeramix linear light engines and drivers that come with a 10 year warranty, 90° and 180° joiners that can be lit or unlit, allowing endless possibilities with continuous ribbons of light without compromise.

General enquiries  
E [lights@xerolighting.com](mailto:lights@xerolighting.com)  
W [xerolighting.com](http://xerolighting.com)  
To get in touch with your local Xero  
Distributor Visit [XEROContacts](#)



The information contained within this specification sheet is for general information purposes only. While Xero aspires to keep the information up to date and correct, we make no representations or warranties of any kind about the accuracy, reliability, suitability or availability with respect to this information, products, services, or graphics contained in this specification sheet for any purpose.



# XTA | 2.0 Square

indoor series IP20

metric 84mm Wide x 90mm High

imperial 2" Wide x 3.54" High

## Performance

Xero Linear Lighting Systems incorporate high end detailing for all their high performance luminaries

XX lumens / watt – delivered
100,000 hours (L90 B10 @ 75°C)
40% less energy

Performance data coming  
Photometry needed first

General enquiries  
E [lights@xerolighting.com](mailto:lights@xerolighting.com)  
W [xerolighting.com](http://xerolighting.com)  
To get in touch with your local Xero Distributor Visit [XEROContacts](#)



The information contained within this specification sheet is for general information purposes only. While Xero aspires to keep the information up to date and correct, we make no representations or warranties of any kind about the accuracy, reliability, suitability or availability with respect to this information, products, services, or graphics contained in this specification sheet for any purpose.

## Standard lengths

Fixture length		Overall length	
2'	600mm	23"	584.2mm
3'	900mm	34"	863.6mm
4'	1200mm	45"	1143.0mm
5'	1500mm	56"	1422.0mm
6'	1800mm	67"	1701.8mm
7'	2000mm	78"	1981.2mm
8'	2300mm	89"	2260.6mm
9'	2600mm	100"	2540.0mm
10'	2900mm	111"	2819.4mm
11'	3100mm	122"	3098.8mm

## Continuous runs

Metric & (imperial) pendant continuous run guide - standard lengths			
nominal fixture length	overall dimension	nominal fixture length	overall dimension
3300mm (11')	3378.2mm (133")	9300mm (32')	9245.6 (364")
3600mm (12')	3657.6mm (144")	9600mm (33')	9525 (375")
3900mm (13')	3397mm (155")	9800mm (34')	9804.4 (386")
4200mm (14')	4216.4mm (166")	10100mm (35')	10083.8 (397")
4500mm (15')	4495.8mm (177")	10300mm (36')	10363.2 (408")
4800mm (16')	4775.2mm (188")	10600mm (37')	10642.6 (419")
5100mm (17')	5054.6mm (199")	10900mm (38')	10922 (430")
5400mm (18')	5334mm (210")	11200mm (39')	11201.4 (441")
5700mm (19')	5613.4mm (221")	11400mm (40')	11480.8 (452")
5900mm (20')	5892.8mm (232")	11700mm (41')	11760.2 (463")
6200mm (21')	6172.2mm (243")	12000mm (42')	12039.6 (474")
6500mm (22')	6451.6mm (254")	12300mm (43')	12319 (485")
6800mm (23')	6731mm (265")	12600mm (44')	12598.4 (496")
7000mm (24')	7010.4mm (276")	12900mm (45')	12877.8 (507")
7300mm (25')	7289.8mm (287")	13200mm (46')	13157.2 (528")
7600mm (26')	7569.2mm (298")	13500mm (47')	13436.6 (539")
7900mm (27')	7848.6mm (309")	13800mm (48')	13716 (550")
8100mm (28')	8128mm (320")	14000mm (49')	13995.4 (561")
8400mm (29')	8407.4mm (331")	14300mm (50')	14274.8 (572")
8700mm (30')	8686.8mm (342")	14600mm (51')	14554.2 (583")
9000mm (31')	8966.2mm (353")	14900mm (52')	14833.6 (594")

## Custom lengths

custom lengths are available in 1" [25mm] increments above the minimum pendant length of 23" [584.2mm]

General enquiries  
 E [lights@xerolighting.com](mailto:lights@xerolighting.com)  
 W [xerolighting.com](http://xerolighting.com)  
 To get in touch with your local Xero  
 Distributor Visit [XEROContacts](#)



**XTA | 2.0 Square**  
indoor series IP20


# Technical data



Side View



Bottom View

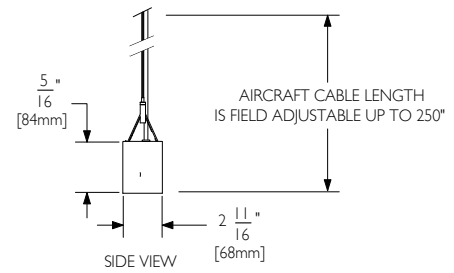

## Specifications

Output*	4ft. length 1120mm	(Delivered lumens)	3000*K		4000*K		RGB	RGBW	Cyanosis
			LO	HO	LO	HO			
Electrical	CRI	80+							
	Lumen maintenance	100,000 hours [L90 @ 75°C] / 150,000hrs [L70 @ 25°C]							
	Power consumption								
	Voltage input range	120 - 277V							
Physical	Control methods	Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI XI							
	Approvals	UL / CE / CCC / AS:NZS / EMC							
Physical	Dimensions	TBA							
	Housing	Aluminium extrusion with anodised or powdercoated finish							
	Diffuser	Frosted acrylic lens / Polycarbonate lens / microprism lens / white optic low brightness louvre							
	Connections	Speed connect joining system with polarised electrical connection between sections							
	Mounting	Field adjustable wire suspensions / rod suspensions / wall mounting / surface mount							
	Compatible ceiling types	Suitable for gyprock (drywall) ceilings, metal pan, concrete, timber and T-bar grid ceilings							
	Joiner options	Corner 90*, Cross 90*, and Tee 90*and straight 180* join							
	Operating temperatures	-25°C to 75°C (-13F to 167F)							
	Environment	Dry - indoor applications only							
	LED board types	Xeramix LED boards in 25mm / 100mm / 280mm / 560mm lengths (Zhaga compatible)							

General enquiries  
 E [lights@xerolighting.com](mailto:lights@xerolighting.com)  
 W [xerolighting.com](http://xerolighting.com)  
 To get in touch with your local Xero  
 Distributor Visit [XEROContacts](#)



---

General enquiries  
E [lights@xerolighting.com](mailto:lights@xerolighting.com) W [xerolighting.com](http://xerolighting.com)  
To get in touch with your local Xero  
Distributor Visit [XEROContacts](#)

