SURFACE MOUNTING | IP55 version

INSTALLATION INSTRUCTION

1. Support structure
2. Fastner
3. Power Connection
4. Profile
5. Gear Tray
6. Diffuser

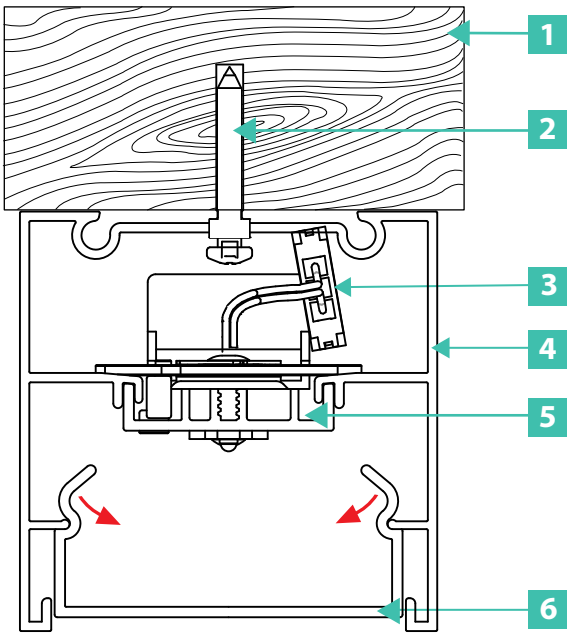

1



Fitting

Suspension Plan

Determine mounting location

2



Remove conseal endplate (if fitted)

3



Remove dffuser

4



Remove gear tray

5



NOTE: Drill holes at 3 metre maximum centres

Drill through top section of the luminaire to accomodate selected fixing screw

6

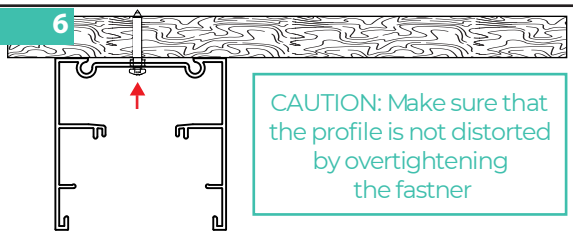

CAUTION: Make sure that the profile is not distorted by overtightening the fastner

Fix screw or selected fastener into support structure

7

If the luminaire run is built from multiple sections: Align adjacent luminaire sections and pass the threaded tube provided through the hole in the end cap of each section

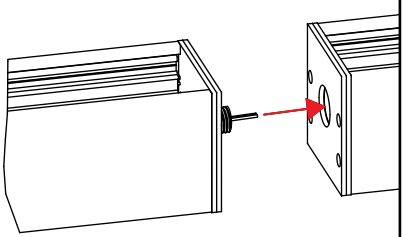

If more information is required please contact you local representative by going to xerolighting.com/contact or email us at headoffice@xerolighting.com

SURFACE MOUNTING | IP55 version (cont)

8

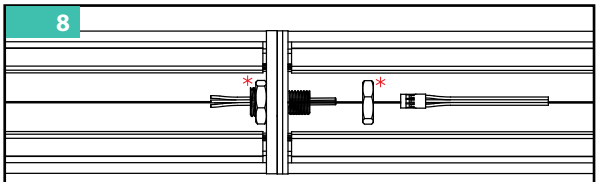

*Screw the nuts provided on to each end of the threaded tube and use them to draw the two luminaire sections together. Take care to align the two luminaire sections during the final stage of tightening

9

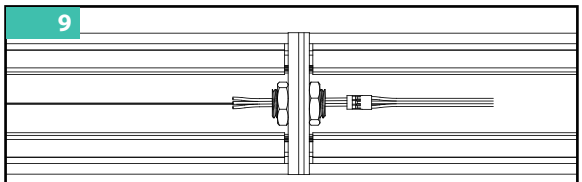

*Pass the electrical harness from one section through the threaded tube and connect to the adjacent harness

10



11