

XERO
TECHNOLOGY
ADVANCED 

XTA | 2.0 Recessed IP55

metric

60mm Wide (inc flange 73mm)
75mm High


imperial

2.36" Wide (inc flanges
2.87") x 2.95" High



LOW UGR



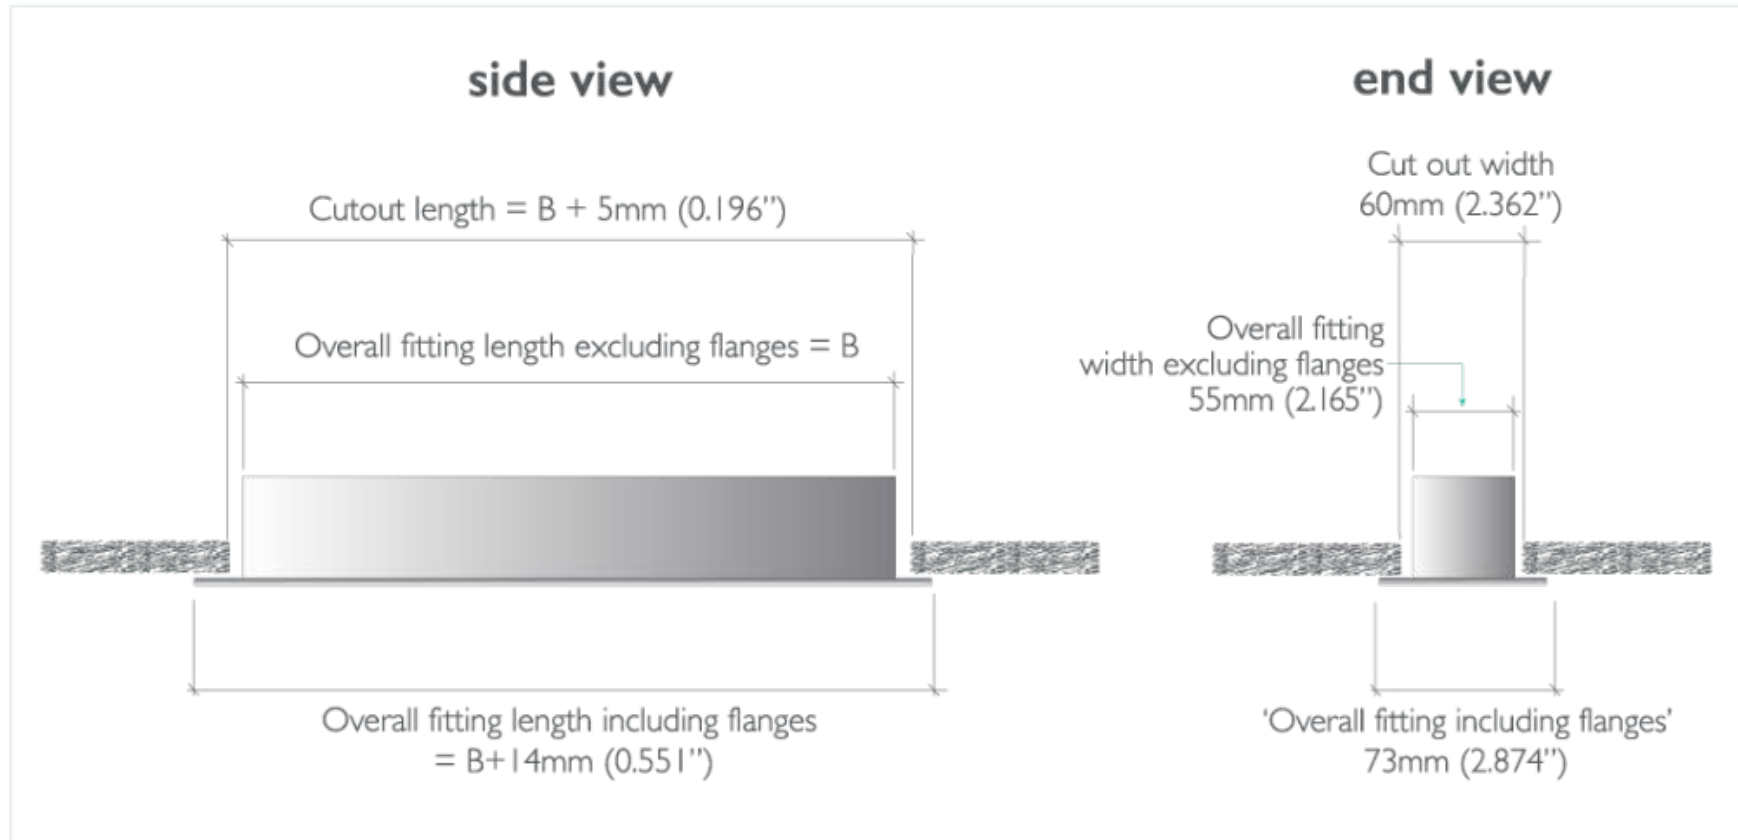

DATA TABLE

LED Engine	4ft Length 1120mm	Luminous Flux (Delivered Lumens)	LO 1900	HO 3500	
	Xeramix	CRI		80+	
	Lumen Maintenance:		114,000 Hours (L90 B10 @ 50°C)		
Proformax	CRI:		90+		
	Lumen Maintenance:		82,000 Hours (L80 B10 @ 35°C)		
Warranty	Xeramix		10 years		
	Proformax		7 years		
Electrical	Power Consumption		Between 20 and 45w/m		
	Voltage input range		120 – 277V		
	Control methods		Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI XI		
	Total harmonic distortion THD		9.8% max		
	Approvals		UL / CE / CCC / AS:NZS / EMC		
Physical	Dimensions		60mm (inc flanges 73mm) X 75 mm high		
	Weight per metre		2.9kg (6.4lbs) average weight		
	Housing		Aluminum Extrusion with anodised or powder-coated finish		
	Diffuser		Frosted acrylic lens / Polycarbonate lens / Microprism lens / Semi specular louvre / Optic white louvre / Low UGR Plexiglass		
	Connections		Polarised electrical connection between the gasket section joins		
	Compatible ceiling type		suitable for gyprock (drywall) ceilings, metal pan, concrete, timber, and T-bar grid ceilings		
	Mounting		Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount		
	Joiner options		lit corner 90° Cross 90° Tee 90° Straight 180° Join		
	Operating temperatures		Xeramix = -25°C to 50°C (-13°F to 140°F) Proformax = -25°C to 35°C (-13°F to 95°F)		
	Environment		IP55 (Not in direct sunlight)		
	Minimum length adjustment		Xeramix = 1mm Proformax = 25mm		
	LED Board types		Xeramix LED boards in 25 / 100 / 280 / 560mm lengths Zhaga compatible Proformax LED boards in 50 / 280mm / 560mm lengths Zhaga compatible		

Optical control


All XTA profiles come with many diffuser options for glare control in any application




Low UGR Plexiglass



Plexiglass



Microprism



Polycarbonate



Semi specular louvre




Optic white louvre

Accessories and options



sensors / daylight
harvesting



emergency packs



downlights

Bend options



135°



cross 90°



tee 90°



custom



corner 90°



ceiling to wall