


## INSTALLATION INSTRUCTION

- 1 Beam or support
- 2 Ceiling
- 3 Fastener
- 4 Profile wall
- 5 Geartray
- 6 Light engine
- 7 Inner sleeve
- 8 Diffuser

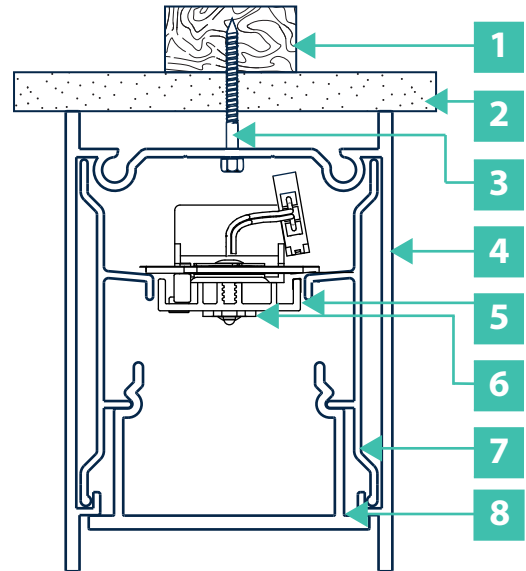

**1**

Fitting  
XTA | 2.5 Loop Slot

Suspension Plan

### Determine mounting location

**3**

Remove Conical Endplate (if fitted)

**4**

Remove diffuser

Note: Position of diffuser relative to body section must remain the same

**5**

Remove geartray

Note: Only remove the plain steel fasteners. **DO NOT** remove the black fasteners

**6**

\*strap section

Drill holes at 3metre maximum centres

Drill through the top section of the luminaire to accommodate selected fixing screws. **\*Please note:** For all curved parts only drill through the strap sections

**7**

**CAUTION: Make sure that the profile is not distorted by overtightening the fastener**

Fix screw or selected fastener into support structure

**8**

If more than one piece do up the latch

**9**

If the latch does not bring sections together adjust latch hook by **turning hook**

**10**

Reconnect all electrical connections

**11**

Replace geartray then reassemble diffuser

**WARNING**

Warning take care to replace diffuser and geartray to original location and ensure that there is a gap between each diffuser to allow for expansion

If more information is required please contact your local representative by going to [xerolighting.com/contact](http://xerolighting.com/contact) or email us at [headoffice@xerolighting.com](mailto:headoffice@xerolighting.com)