

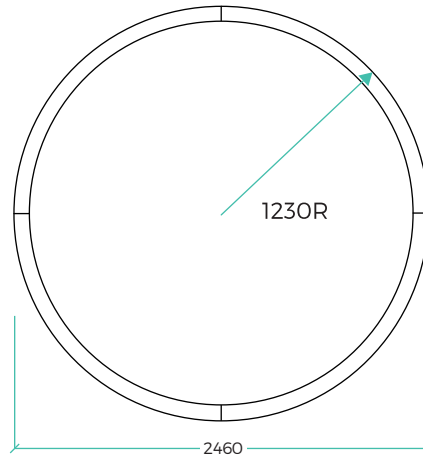


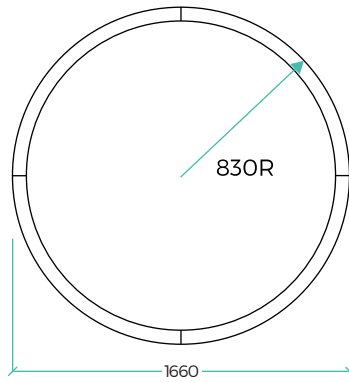

XTA | 2.0 Orbit Recessed 860  
Run Length 2.702m

XTA | 2.0 Orbit Recessed 1660  
Run Length 5.215m

XTA | 2.0 Orbit Recessed 2460  
Run Length 7.728m

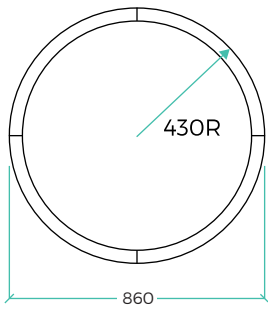

### DATA TABLE

Optic Module LED Engine	Proformax	CRI	90+
		Lumen Maintenance	82,000 Hours
Warranty		7 years	
Dimensions		(Profile size 60mm x 80mm) Orbit sizes - 860 x 860mm / 1660 x 1660mm / 2460 x 2460	
Weight		XTA   2.0 Orbit Slot 860 (8.6kg (18.95lbs)) / XTA   2.5 Ellipse Slot 1660 (18.7kg (41.22lbs)) / XTA   2.5 Orbit Slot 2460 (64kg (142lbs))	
IP Rating		IP20 (dry indoor application only)	
Compatible ceiling type		Suitable for gyprock (drywall) ceilings, metal pan, concrete, timber and T-bar grid ceilings	
Mounting		Wire suspensions, rod suspensions, surface mounting, ceiling mounting	

To create fully customisable variations of these profiles go to -

<https://xerolighting.com/products/xta-2-0-loop-slot/>

XTA | 2.0 Orbit Slot  
specification sheet

