

XERO  
TECHNOLOGY  
ADVANCED 

## XTA | 3.0 Recessed

metric

72mm Wide (inc flanges  
92mm) x 81mm High


imperial

2.83" Wide (inc flanges  
3.62") x 3.18" High


  
**LOW UGR**  
OPTION

ADVANCED  
INDUSTRY BEST  
**10**  
YEAR  
WARRANTY

### side view

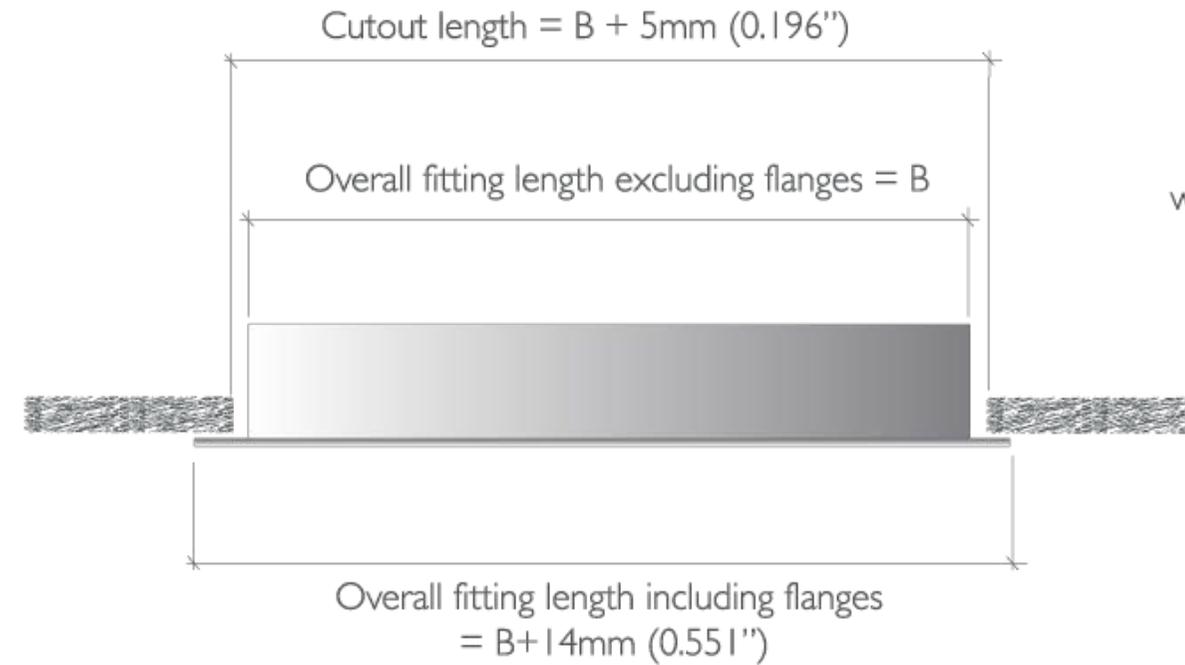

### end view

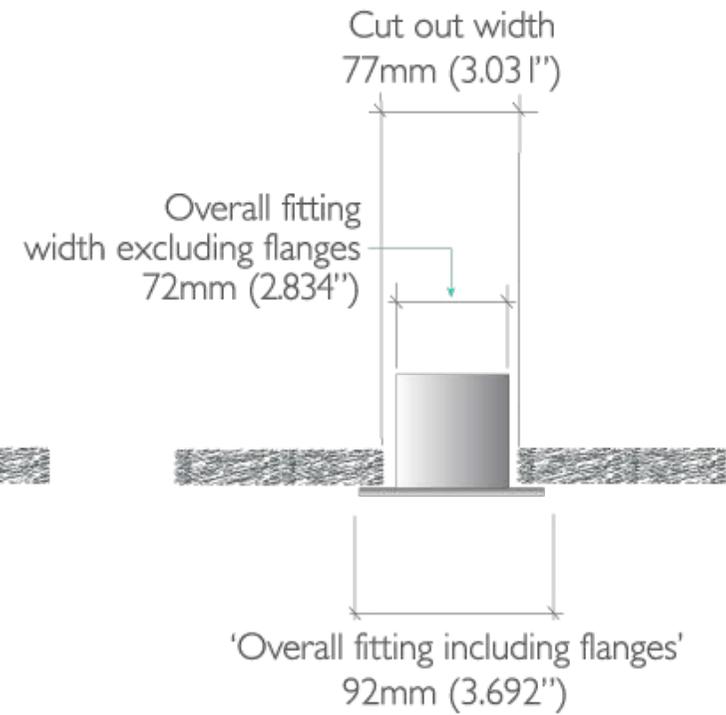

## DATA SHEET

LED Engine	4ft Length	Luminous Flux	LO	HO	
	1120mm	(Delivered Lumens)	1900	3500	
	Xeramix	CRI	80+		
		Lumen Maintenance:	114,000 Hours ( L90 B10 @ 50° )		
	Proformax	CRI:	90+		
		Lumen Maintenance:	82,000 Hours ( L80 B10 @ 35° )		
Warranty	Xeramix		10 years		
	Proformax		7 years		
Electrical	Power Consumption		Between 20 and 45w/m		
	Voltage input range		120 – 277V		
	Control methods		Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI XI		
	Total harmonic distortion THD		9.8% max		
	Approvals		UL / CE / CCC / AS:NZS / EMC		
Physical	Dimensions		72mm (inc flanges 92mm) X 81 mm high		
	Weight per metre		2.8kg (6.2lbs) average weight		
	Distribution		Symmetric		
	Housing		Aluminium Extrusion with anodised or powder-coated finish		
	Diffuser		Frosted acrylic lens / Polycarbonate lens / microprism lens / white optic low brightness louvre / Low UGR Plexiglass		
	Connections		Speed connect joining system with polarised electrical connection between sections		
	Compatible ceiling type		Suitable for gyprock (drywall) ceilings, metal pan, concrete, timber and T-bar grid ceilings		
	Mounting		Gyprock clips as standard		
	Joiner options		Lit corner 90°/ Cross 90°/ Tee 90°/ straight 180° join		
	Operating temperatures		Xeramix = -25°C to 50°C (-13°F to 140°F) Proformax = -25°C to 35°C (-13°F to 95°F)		
	Environment		Dry indoor applications only		
	Minimum length adjustment		Xeramix = 1mm Proformax = 25mm		
	LED Board types		Xeramix LED boards in 25 / 100 / 280 / 560mm lengths Zhaga compatible Proformax LED boards in 50 / 280mm / 560mm lengths Zhaga compatible		

# Optical control

All XTA profiles come with many diffuser options for glare control in any application



low UGR  
plexiglass



polycarbonate



plexiglass



microp prism




optic white  
louvre


# Accessories and options



sensors / daylight  
harvesting



emergency packs



downlights