

XERO  
TECHNOLOGY  
ADVANCED 

## XTA | 1.5 Recessed

metric

40mm Wide (inc flanges  
54mm) x 70mm High


imperial

1.574" Wide (inc flanges  
2.125") x 2.755" High



## DATA TABLE

LED Engine	4ft Length 1120mm	Luminous Flux (Delivered Lumens)	LO 1900	HO 3500	
	Xeramix	CRI	80+		
	Lumen Maintenance:	114,000 Hours ( L90 B10 @ 50° )			
Proformax	CRI:	90+			
	Lumen Maintenance:	82,000 Hours ( L80 B10 @ 35° )			
Warranty	Xeramix		10 years		
	Proformax		7 years		
Electrical	Power Consumption		Between 20 and 45w/m		
	Voltage input range		120 – 277V		
	Control methods		Dimming options for white light: 0-10V, DALI Dimming control: DALI		
	Total harmonic distortion THD		9.8% max		
	Approvals		UL / CE / CCC / AS:NZS / EMC		
Physical	Dimensions		40mm wide (54 including flanges) x 73mm high		
	Weight per metre		1.3kg (3lbs) average weight		
	Housing		Aluminium Extrusion with standard silver powder-coat, black or white textured, (or) optional selected powder-coated finish		
	Downward diffuser		Frosted acrylic lens / Polycarbonate lens / microprism lens		
	Connections		Speed connect joining system with polarised electrical connection between sections		
	Compatible ceiling type		Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings		
	Mounting		Gyprock clips as standard		
	Joiner options		Lit corner 90° / Cross 90° / Tee 90° / Straight 180° join		
	Operating temperatures		Xeramix = -25°C to 50°C (-13°F to 140°F) Proformax = -25°C to 35°C (-13°F to 95°F)		
	Environment		Dry indoor applications only		
	Minimum length adjustment		Xeramix = 1mm Proformax = 25mm		
	LED board types		Xeramix LED boards in 25 / 100 / 280 / 560mm lengths Zhaga compatible Proformax LED boards in 50 / 280mm / 560mm lengths Zhaga compatible		

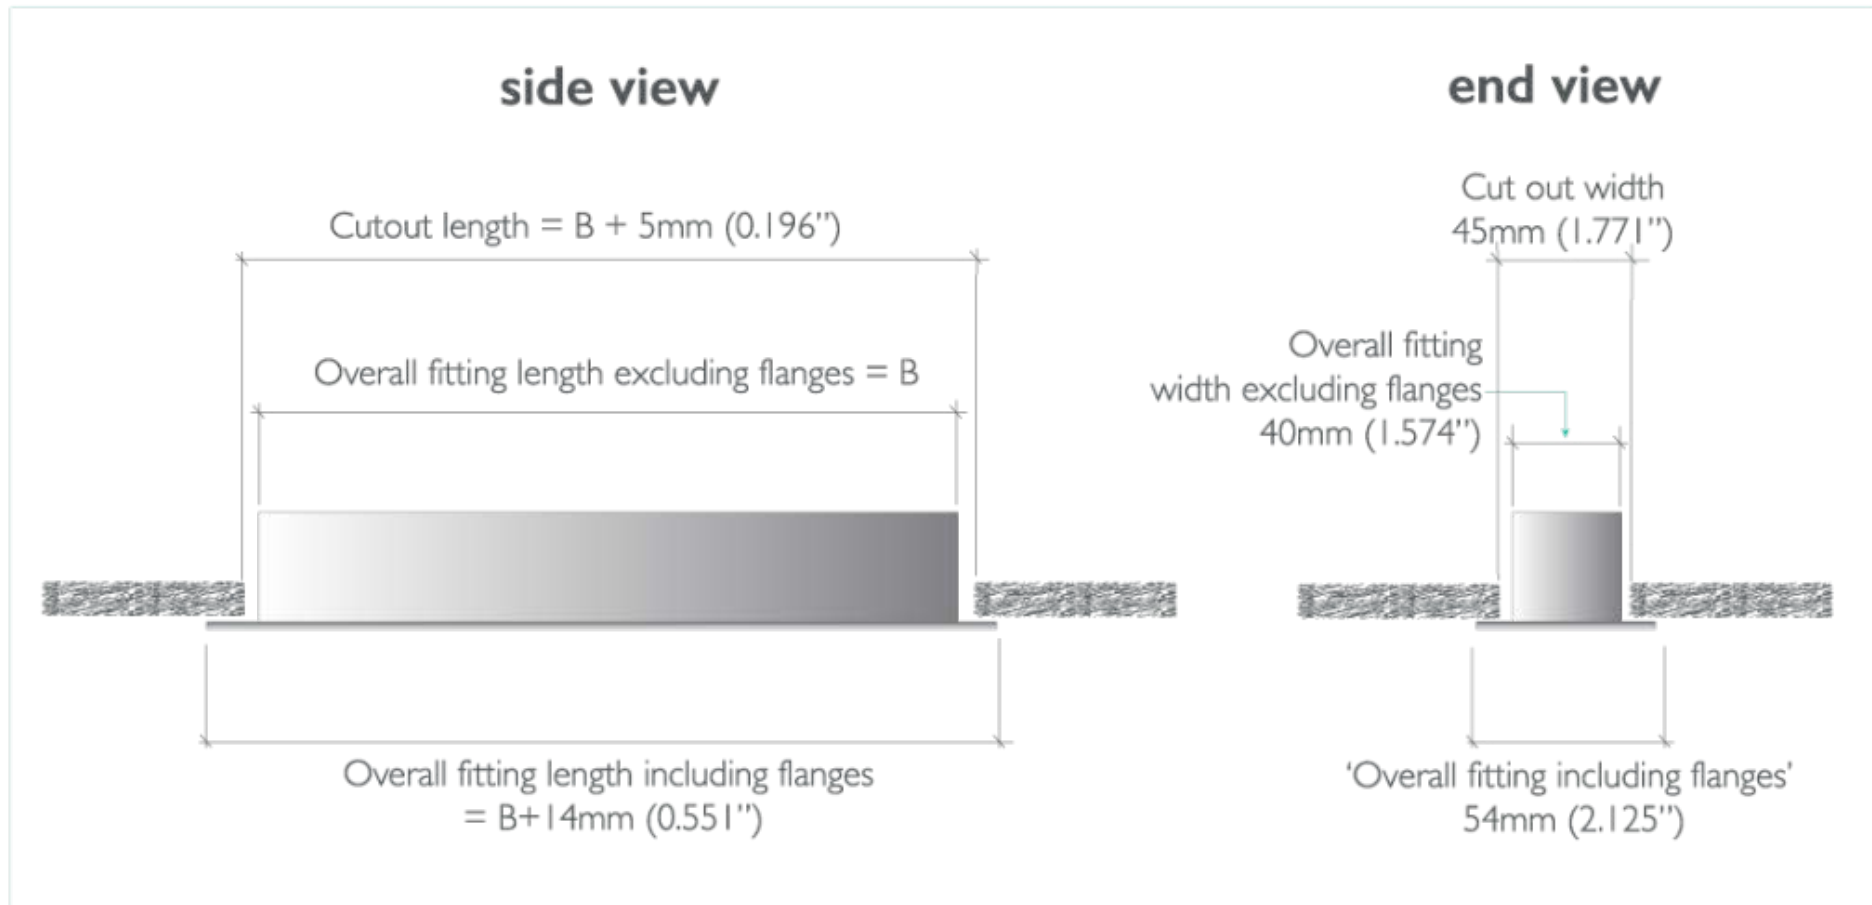

# Optical control

All XTA profiles come with many diffuser options for glare control in any application



polycarbonate




plexiglass




microprism

# Accessories and options



sensors / daylight  
harvesting



emergency packs

# Highly Configurable

All XTA products can be made with lit, or unlit, corners which provide the designer with a myriad of design options.



## bend options



135°



cross 90°



tee 90°



custom



corner 90°



ceiling to wall