


XERO
TECHNOLOGY
ADVANCED XTA

XTA | 1.5 Slot TR Trimless Recessed

IP20 interior

metric	(Niche) 113mm wide x 120mm high
imperial	4.448" Wide x 4.724"H
metric	(Luminaire) 40mm wide x 68mm high
imperial	1.574" Wide x 2.677"H

Trimless Mounting

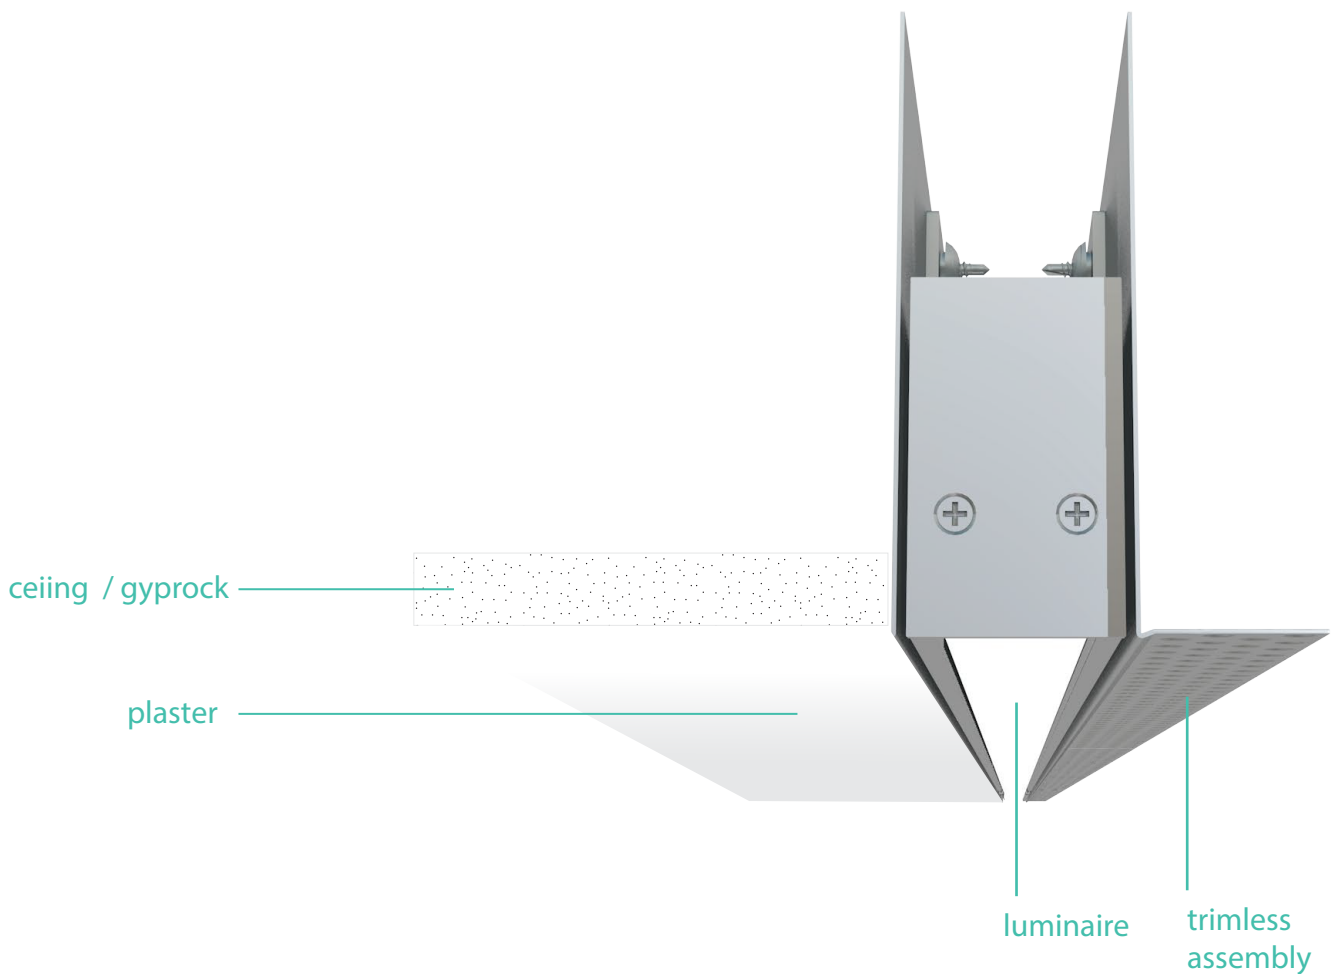

For Trimless Recessed installation instructions refer to <https://xerolighting.com/products/xta-1-5-slot-tr/>

DATA TABLE

LED Engine	4ft Length	Luminous Flux (Delivered Lumens)	LO	HO
	1120mm		1900	3500
	Xeramix	CRI	80+	
		Lumen Maintenance:	114,000 Hours (L90 B10 @ 50°)	
	Proformax	CRI:	90+	
		Lumen Maintenance:	82,000 Hours (L80 B10 @ 35°)	
Warranty	Xeramix	10 years		
	Proformax	7 years		
Electrical	Power Consumption	Between 20 and 45w/m		
	Voltage input range	120 – 277V		
	Control methods	Dimming options for white light: 0-10V, DALI Dimming control: DALI		
	Total harmonic distortion THD	9.8% max		
	Approvals	UL / CE / CCC / AS:NZS / EMC		
Physical	Dimensions (Niche)	113mm wide x 120mm high		
	Dimensions (Luminaire)	40mm wide x 68mm high		
	Weight per metre (Niche)	4.45kg(9.8lbs) average weight		
	Weight per metre (Luminaire)	3.2kg (7lbs) average weight		
	Housing	Aluminium Extrusion with standard silver powder-coat, black or white textured, or optional selected powder-coated finish		
	Downward diffuser	Frosted acrylic lens / Polycarbonate lens / microprism lens		
	Connections	Speed connect joining system with polarised electrical connection between sections		
	Compatible ceiling type	Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings		
	Mounting	Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount		
	Joiner options	Lit corner 90° / Cross 90° / Tee 90° / Straight 180° join		
	Operating temperatures	Xeramix = -25°C to 50°C (-13°F to 140°F) Proformax = -25°C to 35°C (-13°F to 95°F)		
	Environment	Dry indoor applications only		
	Minimum length adjustment	Xeramix = 1mm Proformax = 25mm		
LED board types	Xeramix LED boards in 25 / 100 / 280 / 560mm lengths Zhaga compatible Proformax LED boards in 50 / 280mm / 560mm lengths Zhaga compatible			

XTA | 1.5 Slot TR
Trimless Recessed
IP20 indoor series

Optical control


All XTA profiles come with many diffuser options for glare control in any application



polycarbonate




plexiglass



microp prism

Accessories and options



sensors / daylight
harvesting



emergency packs