


XERO  
TECHNOLOGY  
ADVANCED XTA

# XTA | 3.0 Square TR

## Trimless Recessed

IP20 interior

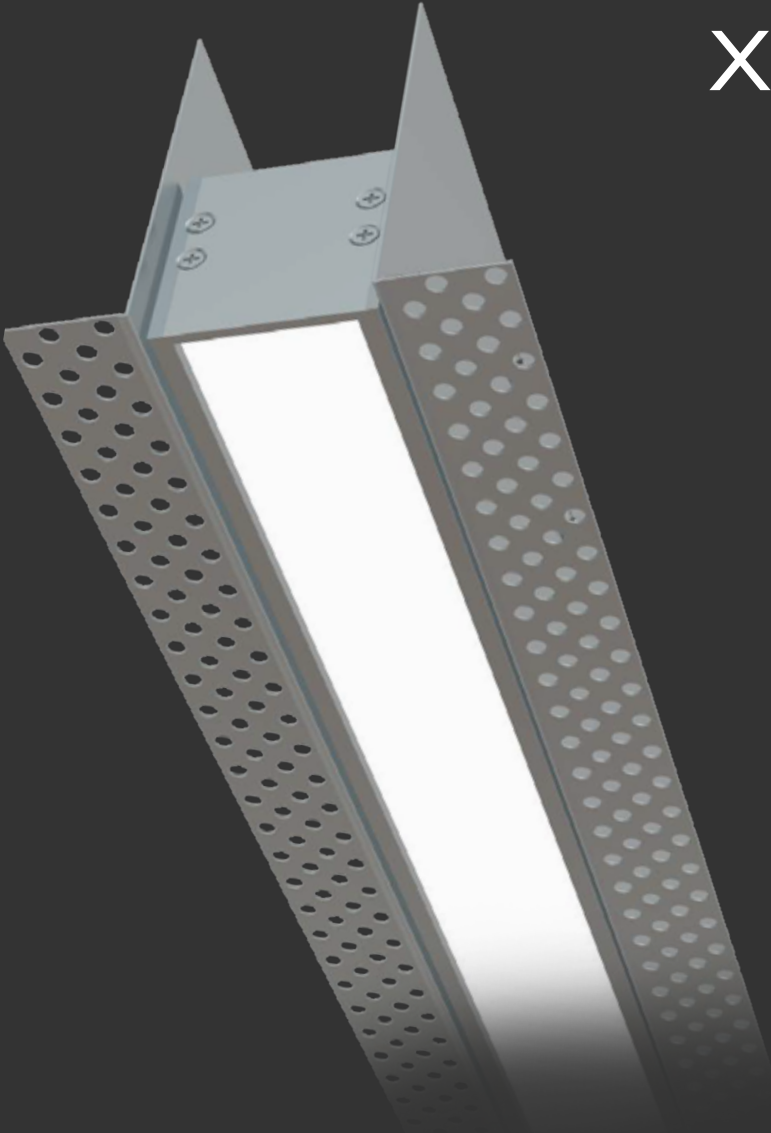

metric	(Niche) 153mm wide x 120mm high
--------	------------------------------------


imperial	6.02" Wide x 4.72" High
----------	-------------------------

metric	(Luminaire) 80mm Wide x 80mm High
--------	--------------------------------------

imperial	3.15" Wide x 3.15" High
----------	-------------------------



# Trimless Mounting

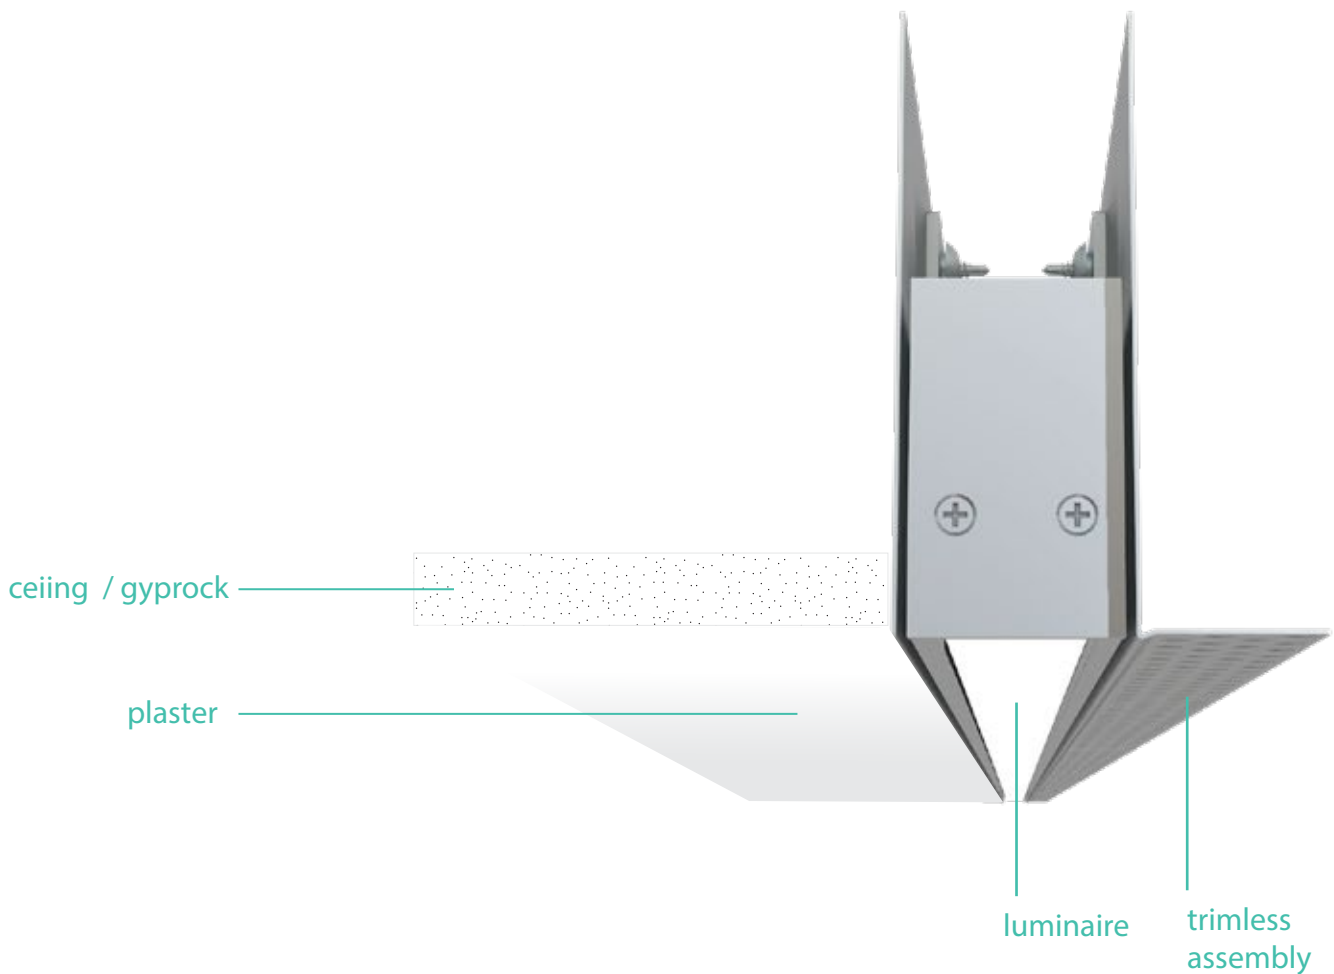

For Trimless Recessed installation instructions refer to <https://xerolighting.com/products/xta-1-5-slot-tr/>

## DATA TABLE

Output	4ft Length	Luminous Flux	LO	HO	
	1120mm	(Delivered Lumens)	1900	3500	
	CRI		80+		
	Lumen Maintenance		114,000 hours [L90 B10 @ 35°C] 1M hours [L70 B10 @ 35°C]		
Warranty	Xeramix 1 = 114,000 hours or Xeramix R = 1 million hours				
Electrical	Power Consumption		Between 20 and 45w/m		
	Voltage input range		120 – 277V		
	Control methods		Dimming options for white light: 0-10V, DALI, DMX / Optional RGB / Sunset Dimming control DMX or DALI XI		
	Total harmonic distortion THD		9.8% max		
	Approvals		UL / CE / CCC / AS:NZS / EMC		
Physical	Dimensions – (Niche)		153mm Wide x 120mm High		
	Dimensions – (Luminaire)		80mm x 80mm		
	Weight per metre (Niche)		4.45kg (9.8lbs) average weight		
	Weight per metre (Luminaire)		3.2kg (4.4lbs) average weight		
	Distribution		Symmetric		
	Housing		Aluminium Extrusion with standard silver powder-coat, black or white textured, (or) optional selected powder-coated finish		
	Diffuser		Plexiglass / Polycarbonate lens / Microprism lens / Optic white louvre / Low UGR Plexiglass / Semi specular louvre		
	Connections		Speed connect joining system with polarised electrical connection between sections		
	Compatible ceiling type		Suitable for gyprock (drywall) ceilings		
	Mounting		Site adjustable plaster trim kit (only)		
	Joiner options		Lit corner 90° Cross 90° Tee 90° straight 180° join		
	Operating temperatures		-25°C to 50°C (-13F to 140°F)		
	Environment		Dry – Indoor applications only		
	Minimum length adjustment		25mm		
LED board types		XERAMIX LED boards in 25mm / 100mm / 280mm / 560mm lengths ZHAGA compatible			

## Optical control

All XTA profiles come with many diffuser options for glare control in any application



polycarbonate




plexiglass



microp prism



optic white  
louvre



semi specular  
louvre



low UGR  
plexiglass

## Accessories and options



sensors / daylight  
harvesting



emergency packs