




# XTA|4.0 Square D/I | H/O

(High Output)  
indoor only IP20

**Metric:** 110mm Wide x 110mm High

**Imperial:** 4.330" Wide x 4.330" High

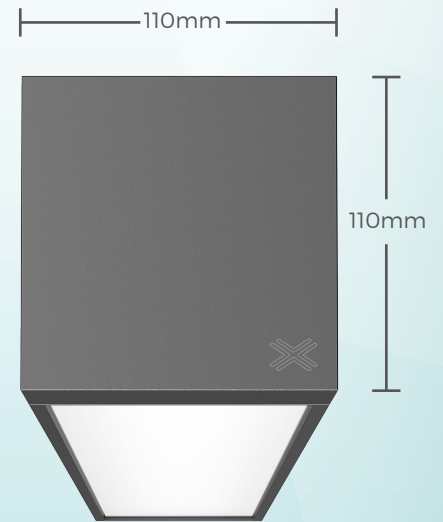

Xero Linear Lighting Systems  
General Enquiries  
P: +61 2 8599 9788  
E: [headoffice@xerolighting.com](mailto:headoffice@xerolighting.com)



DATA TABLE

LED Engine	4 Ft Length 1120mm	Luminous Flux (Delivered Lumens)	LO	HO	
			4300	8000	
LED Engine	Xeramix	CRI:	80+		
		Lumen Maintenance:	114,000 Hours ( L90 B10 @ 50° )		
	Proformax	CRI:	90+		
		Lumen Maintenance:	82,000 Hours ( L80 B10 @ 35° )		
Warranty	Xeramix		10 years		
	Proformax		7 years		
Electrical	Power Consumption		Between 40 and 90w/m		
	Voltage input range		120 - 277V		
	Control methods		Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Diming control DMX or DALI XI		
	Total harmonic distortion THD		9.8% max		
	Approvals		UL / CE / CCC / AS:NZS / EMC		
Physical	Dimensions		110 x 110mm		
	Weight per metre		5.7kg (12.56lbs) average weight		
	Housing		Aluminium Extrusion with silver powder-coated or powder-coated finish		
	End Plates		Consealed magnetic end plates		
	Upward diffuser		PlexiGlass as standard / Optional - Asymmetric Lens / Extra Wide Beam Lens		
	Downward diffuser		PlexiGlass		
	Connections		Speed connect joining system with polarised electrical connection between sections		
	Compatible ceiling type		Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings		
	Mounting		Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount		
	Joiner options		Lit corner 90° / Cross 90° / Tee 90° / Straight 180° join		
	Operating temperatures		Xeramix = -25°C to 50°C (-13°F to 140°F) Proformax = -25°C to 35°C (-13°F to 95°F)		
	Environment		Dry indoor applications only		
	Minimum length adjustment		Xeramix = 1mm Proformax = 50mm		
	LED Board types		Xeramix LED boards in 25 / 100 / 280 / 560mm lengths Zhaga compatible Proformax LED boards in 50 / 280 / 560mm lengths Zhaga compatible		

XTA | 4.0 Square D/I | H/O

Bend Options



135°



cross 90°



Tee 90°



custom




corner 90°




ceiling to wall

**Performance Optional**  
Optical control Up (only)



Extra Wide Beam Lens



Asymmetric Lens

**Standard Optical Control**  
Down & Up



plexiglass



Accessories and options



sensors / daylight harvesting



emergency packs



downlights

Rollerball Suspension

The smart suspension system that can be mounted on any surface whether a flat or sloped ceiling or even a wall

Axis geartray

This truly unique innovation adopts our revolutionary cam lock for quick and simple 'single person' installation. The system is also 'future proofed' by having the ability to easily upgrade as LED technology rapidly advances.

