




XTS | 2.0 Slot

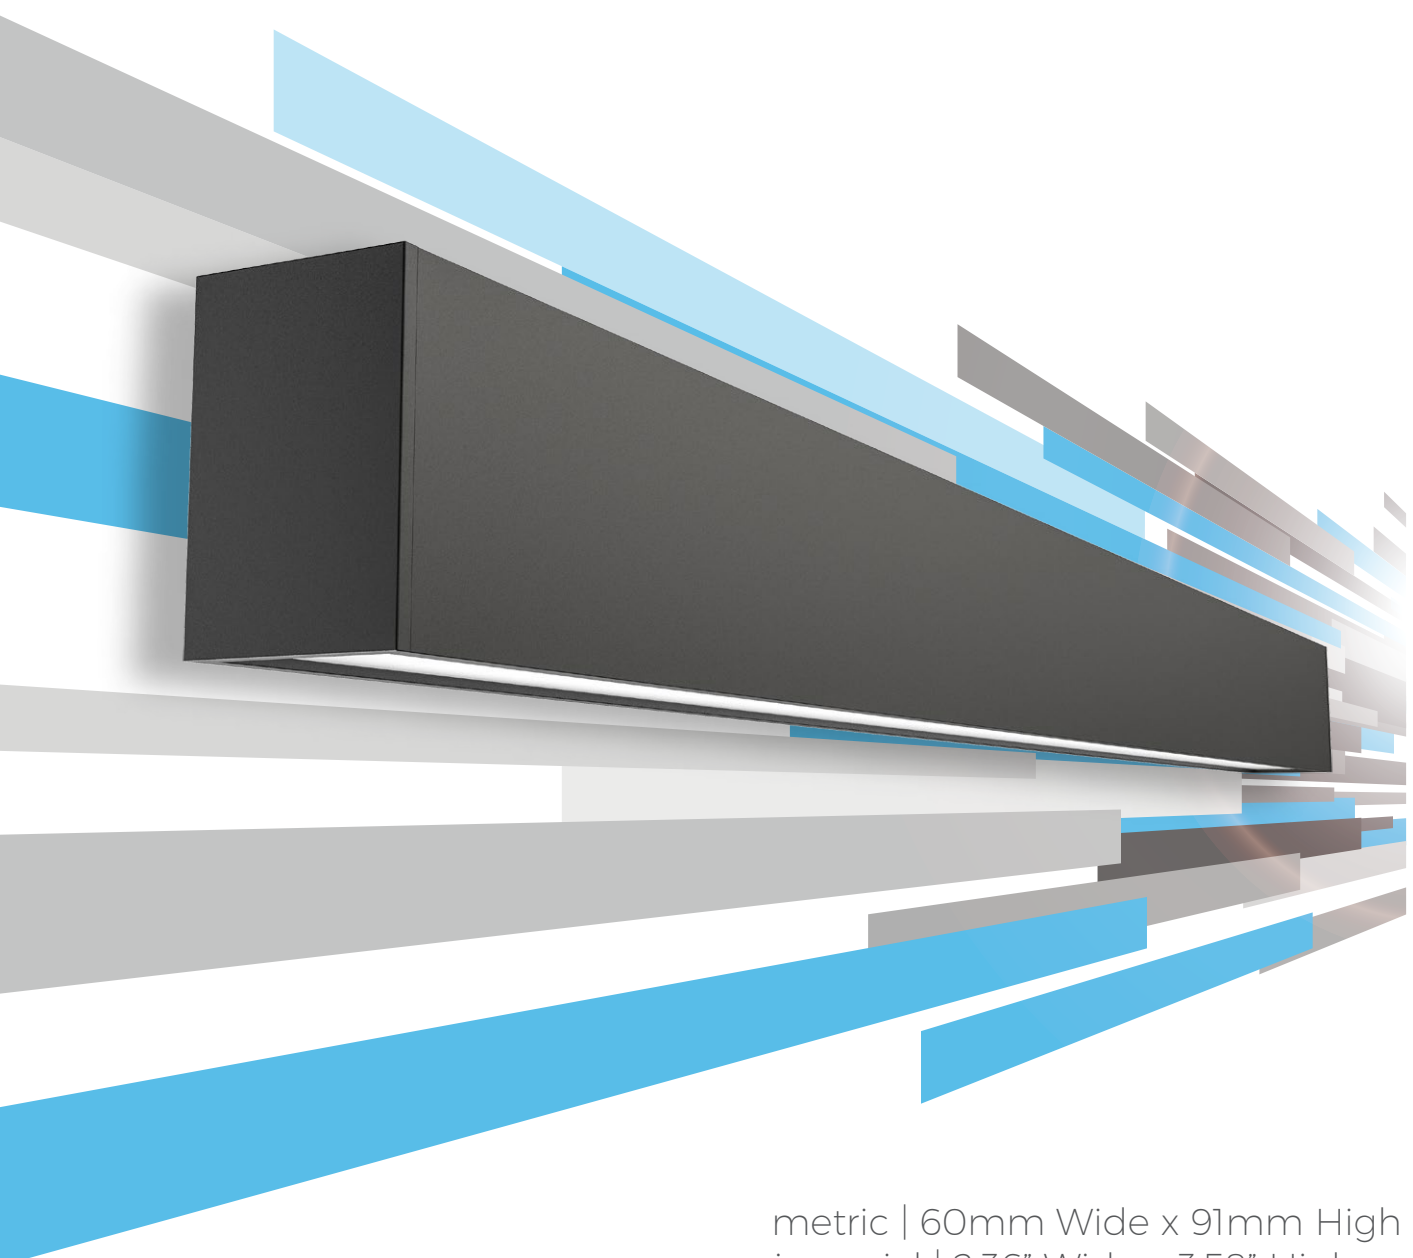

metric | 60mm Wide x 91mm High
imperial | 2.36" Wide x 3.58" High

*Illustration shows 'optional' screwless endplate



Xero Linear Lighting Systems
14 Voyager Circuit, Glendenning NSW Australia 2761

General Enquiries
P: +61 2 8599 9788
E: headoffice@xerolighting.com



DATA TABLE

	4 Ft Length 1120mm	Luminous Flux (Delivered Lumens)	LO 1900	HO 3500	
LED Engine	Proformax	CRI:	90+		
		Lumen Maintenance:	82,000 Hours (L80 B10 @ 35°)		
Warranty	Proformax		7 years		
Electrical	Power Consumption		Between 20 and 45w/m		
	Voltage input range		120 - 277V		
	Control methods		Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Diming control DMX or DALI XI		
	Total harmonic distortion THD		9.8% max		
	Approvals		UL / CE / CCC / AS:NZS / EMC		
Physical	Dimensions		60 x 91mm		
	Weight per metre		3.0kg (6.6lbs) average weight		
	Housing		Aluminium Extrusion with silver powder-coat or other powder-coated finishes		
	End Plates		Screwed End Plates (Standard) / Screw-Less End Plates (Optional)		
	Downward diffuser		Frosted acrylic lens		
	Connections		Polarised electrical connection between sections		
	Compatible ceiling type		Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings		
	Mounting		Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount		
	Joiner options		Lit corner 90° / Cross 90° / Tee 90° / Straight 180° join		
	Operating temperatures		Proformax = -25°C to 35°C (-13°F to 95°F)		
	Environment		Dry indoor applications only		
	Minimum length adjustment		Proformax = 50mm		
	LED Board types		Proformax LED boards in 50 / 280mm / 560mm lengths Zhaga compatible		



Bend Options



135°



cross 90°



Tee 90°



custom



corner 90°



ceiling to wall

Optical Control



plexiglass

All XTS profiles come with optional diffuser options for glare control in any application

Accessories and options



sensors / daylight
harvesting



emergency packs



downlights



Rollerball Suspension

The smart suspension system that can be mounted on any surface whether a flat or sloped ceiling or even a wall

Axis geartray

This truly unique innovation adopts our revolutionary cam lock for quick and simple 'single person' installation. The system is also 'future proofed' by having the ability to easily upgrade as LED technology rapidly advances.

