




XERO
TECHNOLOGY
ADVANCED

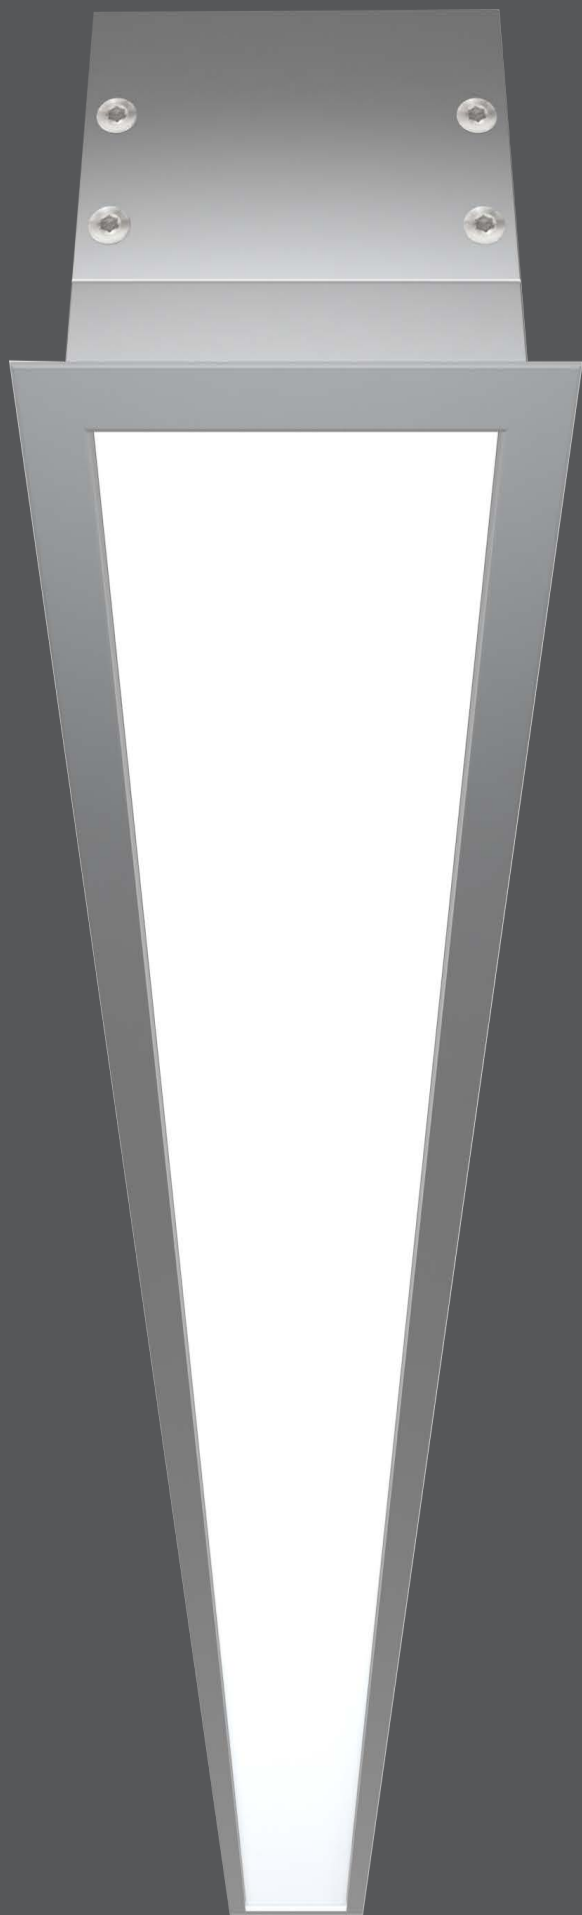

XTA | 1.5 Recessed IP55

metric

40mm Wide (inc flanges
54mm) x 70mm High

imperial

1.574" Wide (inc flanges
2.125") x 2.755" High



Highly Configurable

All XTA products can be made with lit, or unlit, corners which provide the designer with a myriad of design options.



bend options



135°



cross 90°



tee 90°



custom




corner 90°




ceiling to wall

side view

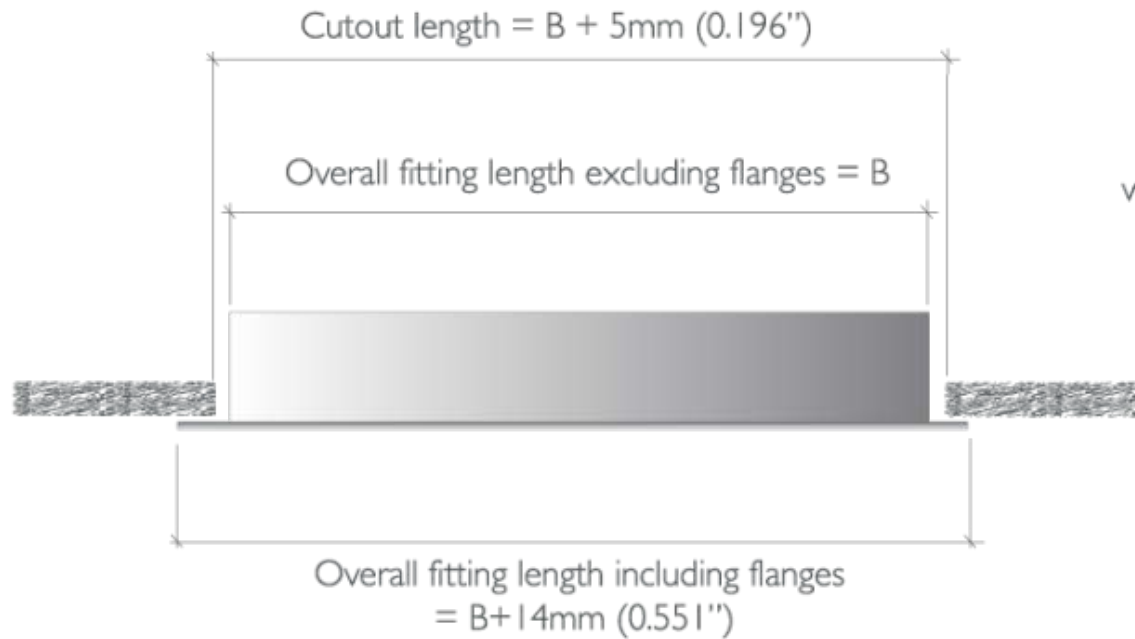

end view

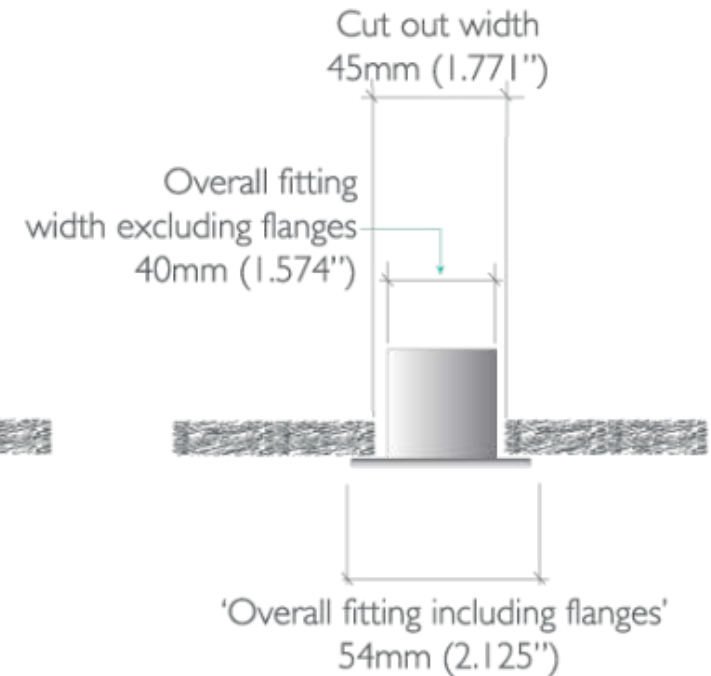

DATA TABLE

LED Engine	4ft Length 1120mm	Luminous Flux (Delivered Lumens)	LO 1900	HO 3500	
	Xeramix	CRI	80+		
		Lumen Maintenance:	114,000 Hours (L90 B10 @ 50°)		
	Proformax	CRI:	90+		
		Lumen Maintenance:	82,000 Hours (L80 B10 @ 35°)		
Warranty	Xeramix		10 years		
	Proformax		7 years		
Electrical	Power Consumption		Between 20 and 45w/m		
	Voltage input range		120 – 277V		
	Control methods		Dimming options for white light: 0-10V, DALI Dimming control: DALI		
	Total harmonic distortion THD		9.8% max		
	Approvals		UL / CE / CCC / AS:NZS / EMC		
Physical	Dimensions		54 wide (with Flange 73mm) x 71mm high		
	Weight per metre		1.3kg (3lbs) average weight		
	Housing		Aluminium Extrusion with standard silver powder-coat, black or white textured, (or) optional selected powder-coated finish		
	Downward diffuser		Frosted acrylic lens / Polycarbonate lens / microprism lens		
	Connections		Polarised electrical connection between gasket section joins		
	Compatible ceiling type		Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings		
	Mounting		Gyprock clips as standard		
	Joiner options		(Unlit Joins) Corner 90° / Cross 90° / Tee 90° / Straight 180° join		
	Operating temperatures		Xeramix = -25°C to 50°C (-13°F to 140°F) Proformax = -25°C to 35°C (-13°F to 95°F)		
	Environment		IP55 (Not in direct sunlight)		
	Minimum length adjustment		Xeramix = 1mm Proformax = 25mm		
	LED board types		Xeramix LED boards in 25 / 100 / 280 / 560mm lengths Zhaga compatible Proformax LED boards in 50 / 280mm / 560mm lengths Zhaga compatible		

Optical control

All XTA profiles come with many diffuser options for glare control in any application



polycarbonate




plexiglass



microprism

Accessories and options



sensors / daylight
harvesting



emergency packs