




XTA|4.0 Square D/I | H/O

(High Output)
Semi outdoor IP55

Metric: 110mm Wide x 110mm High

Imperial: 4.330" Wide x 4.330" High

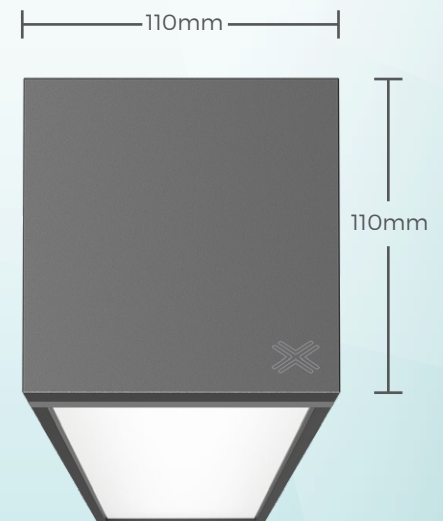

Xero Linear Lighting Systems
General Enquiries
P: +61 2 8599 9788
E: headoffice@xerolighting.com



XTA | 4.0 Square D/I | H/O

Semi outdoor IP55

DATA TABLE

LED Engine	4 Ft Length 1120mm		Luminous Flux (Delivered Lumens)	LO 4300	HO 8000
	Xeramix	CRI:	80+		
		Lumen Maintenance:	114,000 Hours (L90 B10 @ 50°)		
	Proformax	CRI:	90+		
		Lumen Maintenance:	82,000 Hours (L80 B10 @ 35°)		
Warranty	Xeramix			10 years	
	Proformax			7 years	
Electrical	Power Consumption			Between 40 and 90w/m	
	Voltage input range			120 - 277V	
	Control methods			Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Diming control DMX or DALI XI	
	Total harmonic distortion THD			9.8% max	
	Approvals			UL / CE / CCC / AS:NZS / EMC	
Physical	Dimensions			110 x 110mm	
	Weight per metre			5.7kg (12.56lbs) average weight	
	Housing			Aluminium Extrusion with silver powder-coat or other powder-coated finishes	
	End Plates			Consealed magnetic end plates	
	Upward diffuser			PlexiGlass as standard / Optional - Asymmetric Lens / Extra Wide Beam Lens	
	Downward diffuser			PlexiGlass	
	Connections			Speed connect joining system with polarised electrical connection between sections	
	Compatible ceiling type			Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings	
	Mounting			Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount	
	Joiner options			Lit corner 90° / Cross 90° / Tee 90° / Straight 180° join	
	Operating temperatures			Xeramix = -25°C to 50°C (-13°F to 140°F) Proformax = -25°C to 35°C (-13°F to 95°F)	
	Environment			IP55 (Not in direct sunlight)	
	Minimum length adjustment			Xeramix = 1mm Proformax = 50mm	
	LED Board types			Xeramix LED boards in 25 / 100 / 280 / 560mm lengths Zhaga compatible Proformax LED boards in 50 / 280 / 560mm lengths Zhaga compatible	

XTA | 4.0 Square D/I | H/O
Semi Outdoor IP55

Bend Options



135°



cross 90°



Tee 90°



custom




corner 90°




ceiling to wall

Performance Optional

Optical control Up (only)



Extra Wide
Beam Lens



Asymmetric
Lens

Standard Optical Control

Down & Up



plexiglass

Accessories and options



sensors / daylight
harvesting



emergency packs



downlights



Rollerball Suspension

The smart suspension system that can be mounted on any surface whether a flat or sloped ceiling or even a wall

Axis geartray

This truly unique innovation adopts our revolutionary cam lock for quick and simple 'single person' installation. The system is also 'future proofed' by having the ability to easily upgrade as LED technology rapidly advances.

