

XTA | 4.0 Square IP

semi outdoor IP55

Metric: 110mm Wide x 110mm High

Imperial: 4.330" Wide x 4.330" High



Xero Linear Lighting Systems
General Enquiries
P: +61 2 8599 9788
E: headoffice@xerolighting.com




XTA | 4.0 Square IP55

DATA TABLE

LED Engine	4 Ft Length 1120mm		Luminous Flux (Delivered Lumens)	LO 4300	HO 8000	
	Xeramix	CRI:		80+		
		Lumen Maintenance:		114,000 Hours (L90 B10 @ 50°)		
	Proformax	CRI:		90+		
	Lumen Maintenance:		82,000 Hours (L80 B10 @ 35°)			
Warranty	Xeramix			10 years		
	Proformax			7 years		
Electrical	Power Consumption			Between 20 and 45w/m		
	Voltage input range			120 - 277V		
	Control methods			Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Diming control DMX or DALI XI		
	Total harmonic distortion THD			9.8% max		
	Approvals			UL / CE / CCC / AS:NZS / EMC		
Physical	Dimensions			110 x 110mm		
	Weight per metre			5.1kg (11.24lbs) average weight		
	Housing			Aluminium Extrusion with silver powder-coat or powder-coated finish		
	End Plates			Consealed magnetic end plates		
	Downward diffuser			PlexiGlass		
	Connections			Speed connect joining system with polarised electrical connection between sections		
	Compatible ceiling type			Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings		
	Mounting			Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount		
	Joiner options			Lit corner 90° / Cross 90° / Tee 90° / Straight 180° join		
	Operating temperatures			Xeramix = -25°C to 50°C (-13°F to 140°F) Proformax = -25°C to 35°C (-13°F to 95°F)		
	Environment			Semi Outdoor IP55 (Not in direct sunlight)		
	Minimum length adjustment			Xeramix = 1mm Proformax = 50mm		
	LED Board types			Xeramix LED boards in 25 / 100 / 280 / 560mm lengths Zhaga compatible Proformax LED boards in 50 / 280 / 560mm lengths Zhaga compatible		

XTA | 4.0 Square IP55

Dimensions

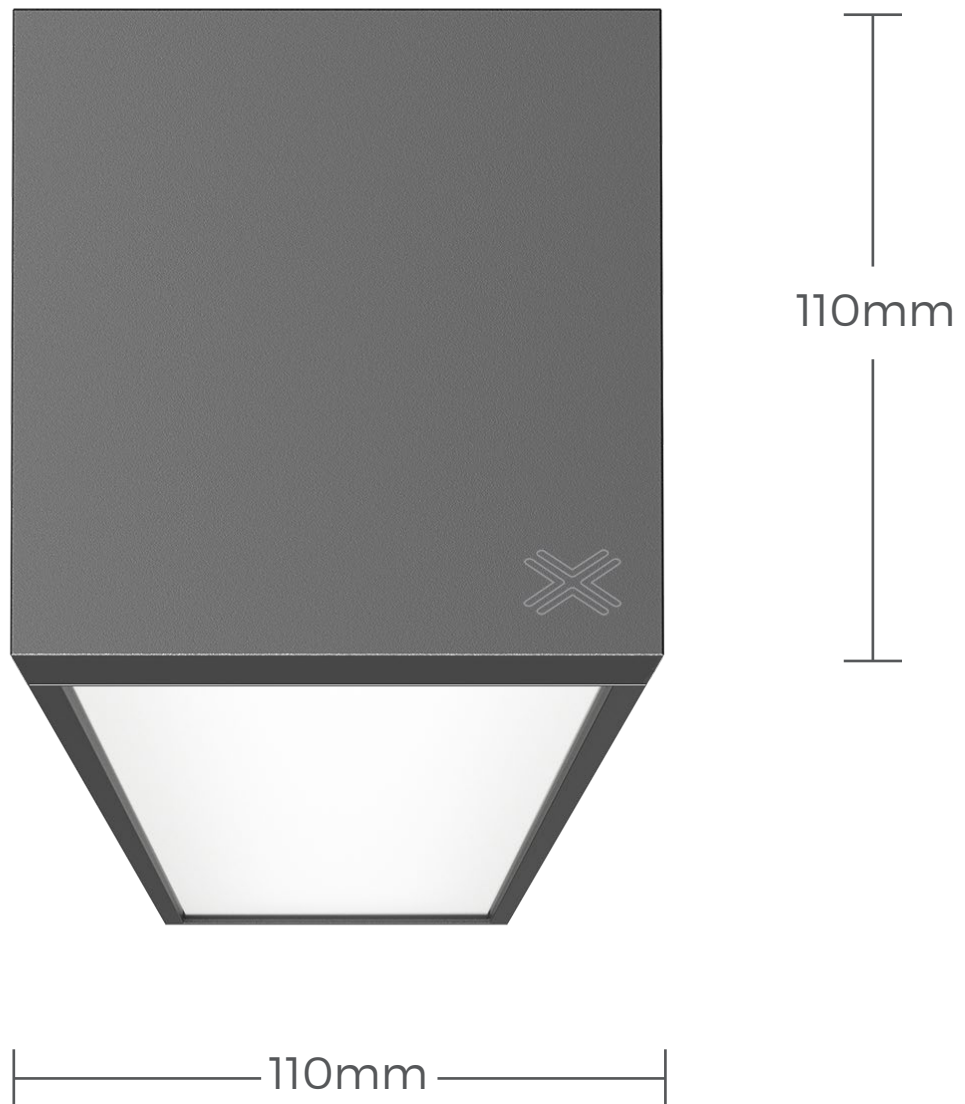

XTA | 4.0 Square IP55

Bend Options



135°



cross 90°



Tee 90°



custom



corner 90°



ceiling to wall

Optical Control



PlexiGlass



Accessories and options



sensors / daylight
harvesting



emergency packs



downlights

Rollerball Suspension

The smart suspension system that can be mounted on any surface whether a flat or sloped ceiling or even a wall

Axis geartray

This truly unique innovation adopts our revolutionary cam lock for quick and simple 'single person' installation. The system is also 'future proofed' by having the ability to easily upgrade as LED technology rapidly advances.

