XERO TECHNOLOGY SPECIFICATION XTS

XTS | 3.0Slot

INACTIVE PRODUCTS

THIS IS A INACTIVE PRODUCT

Thank you for considering this inactive product. Please note that this product may require a longer lead time and a minimum order quantity.
For more detailed information on this profile, we recommend speaking with your local Xero Specification Consultant.
Visit xerolighting.com/contact for further assistance.



metric | 80mm Wide x 115mm High
imperial | 3.149" Wide x 4.527" High

*Illustration shows 'optional' screw-less end plate

STANDARD QUALITY ASSURED 7 YEAR WARRANTY

Xero Linear Lighting Systems
14 Voyager Circuit, Glendenning NSW Australia 2761

General Enquiries
P: +61 2 8599 9788
E: headoffice@xerolighting.com

XERO Linear Lighting Systems

version 3 | 8 Aug 2024

XERO TECHNOLOGY SPECIFICATION XTS

XTS | 3.0 Slot

DATA TABLE

LED Engine	4 Ft Length 1120mm	Luminous Flux (Delivered Lumens)	LO 1900	HO 3500
	Proformax	CRI:	90+	
		Lumen Maintenance:	82,000 Hours (L80 B10 @ 35°)	
Warranty	Proformax		7 years	
Electrical	Power Consumption		Between 20 and 45w/m	
	Voltage imput range		120 - 277V	
	Control methods		Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Diming control DMX or DALI XI	
	Total harmonic distortion THD		9.8% max	
	Approvals		UL / CE / CCC / AS:NZS / EMC	
Physical	Dimensions		80 x 115mm	
	Weight per metre		3.8kg (8.41lbs) average weight	
	Housing		Aluminium Extrusion with silver powder-coat or other powder-coated finishes	
	End Plates		Screwed End Plates (Standard) / Screw-Less End Plates (Optional)	
	Downward diffuser		Frosted acrylic lens	
	Connections		Polarised electrical connection between sections	
	Compatible ceiling type		Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings	
	Mounting		Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount	
	Joiner options		Lit corner 90° / Cross 90° / Tee 90° / Straight 180° join	
	Operating temperatures		Proformax = -25°C to 35°C (-13°F to 95°F)	
	Environment		Dry indoor applications only	
	Minimum length adjustment		Proformax = 50mm	
	LED Board types		Proformax LED boards in 50 / 280mm / 560mm lengths Zhaga compatible	

STANDARD QUALITY ASSURED 7 YEAR WARRANTY

Xero Linear Lighting Systems
14 Voyager Circuit, Glendenning NSW Australia 2761

General Enquiries
P: +61 2 8599 9788
E: headoffice@xerolighting.com

XERO Linear Lighting Systems

XERO TECHNOLOGY SPECIFICATION XTS

XTS | 3.0 Square

Bend Options

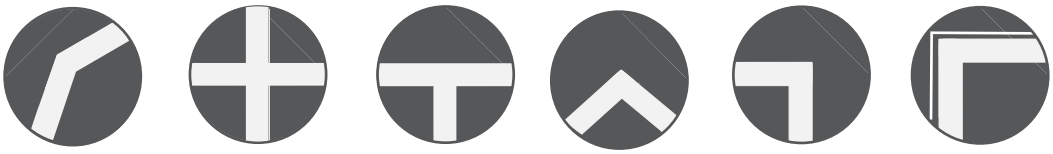

135° | cross 90° | Tee 90° | custom | corner 90° | ceiling to wall

Optical Control



plexiglass



Accessories and options



sensors / daylight harvesting | emergency packs | downlights

Rollerball Suspension

The smart suspension system that can be mounted on any surface whether a flat or sloped ceiling or even a wall

Axis geartray

This truly unique innovation adopts our revolutionary cam lock for quick and simple 'single person' installation. The system is also 'future proofed' by having the ability to easily upgrade as LED technology rapidly advances.



STANDARD QUALITY ASSURED 7 YEAR WARRANTY

Xero Linear Lighting Systems
14 Voyager Circuit, Glendenning NSW Australia 2761

General Enquiries
P: +61 2 8599 9788
E: headoffice@xerolighting.com

XERO Linear Lighting Systems