


XERO
TECHNOLOGY
INFRASTRUCTURE



XTI | 1.5 Slot IK11 | IP66

Metric | 42 x 87mm
Imperial | 1.65" x 3.42"

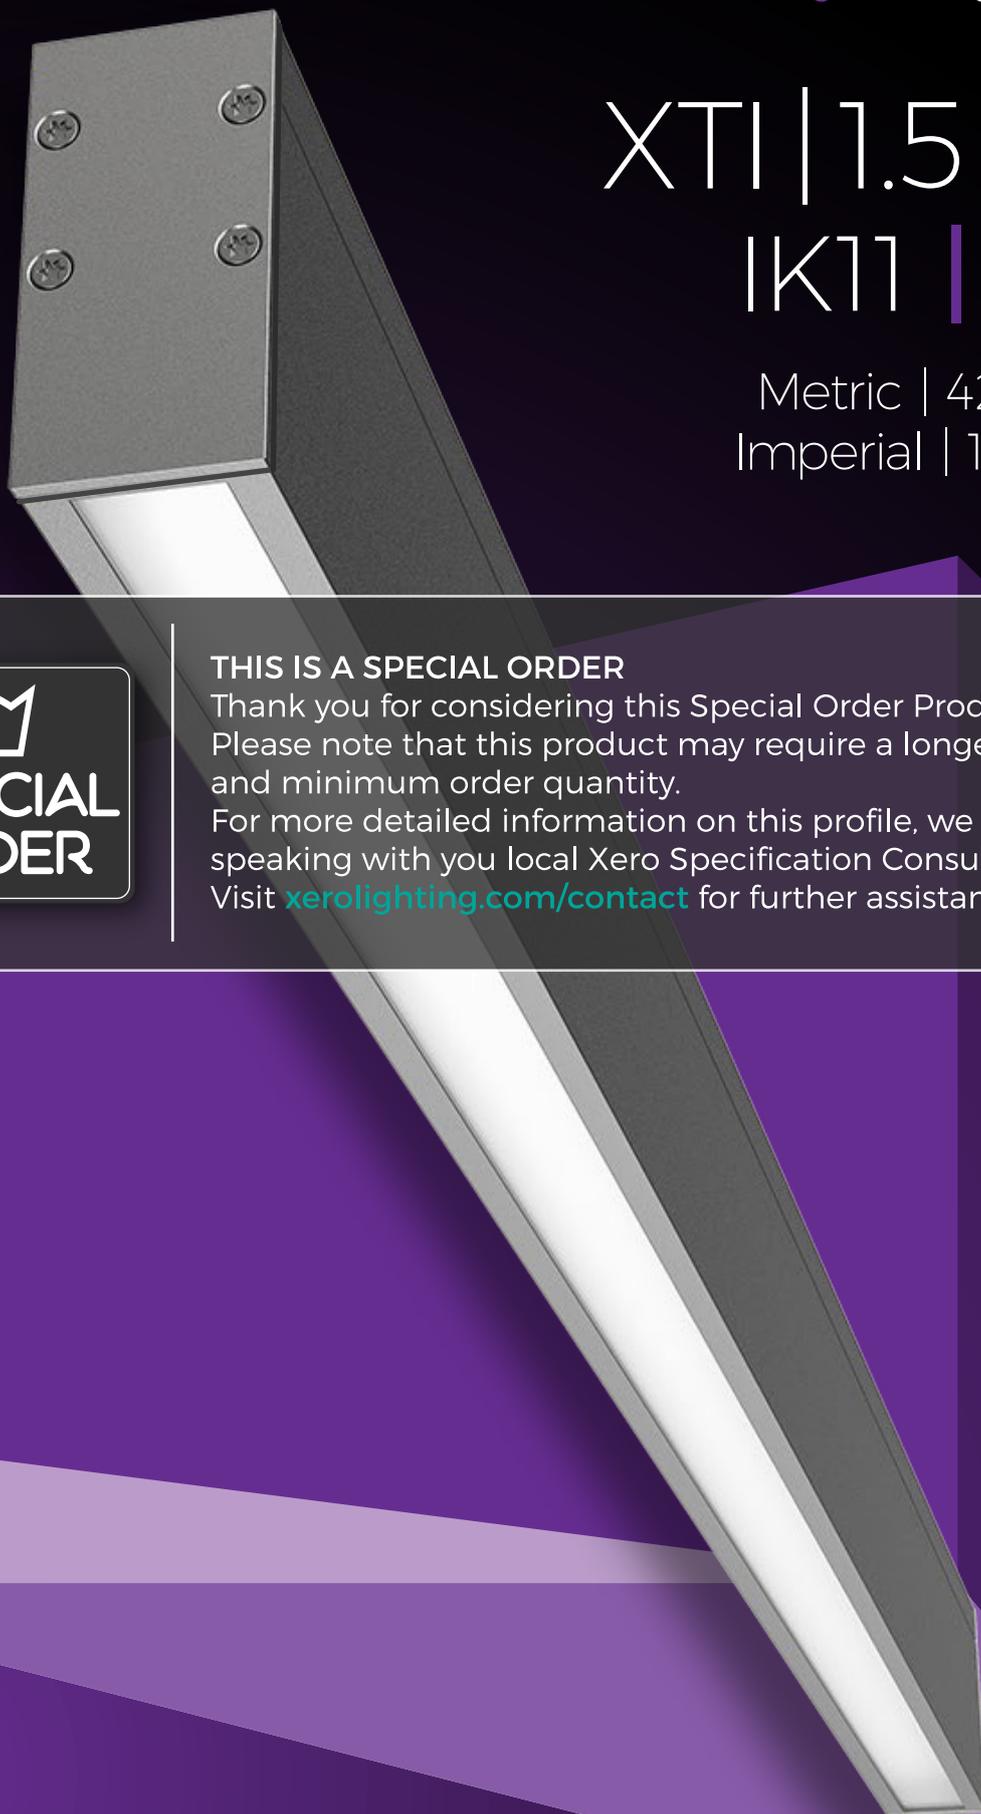


THIS IS A SPECIAL ORDER

Thank you for considering this Special Order Product. Please note that this product may require a longer lead time and minimum order quantity.

For more detailed information on this profile, we recommend speaking with your local Xero Specification Consultant. Visit [xerolighting.com/contact](https://www.xerolighting.com/contact) for further assistance



XTI|1.5 Slot
IP66 | IK11

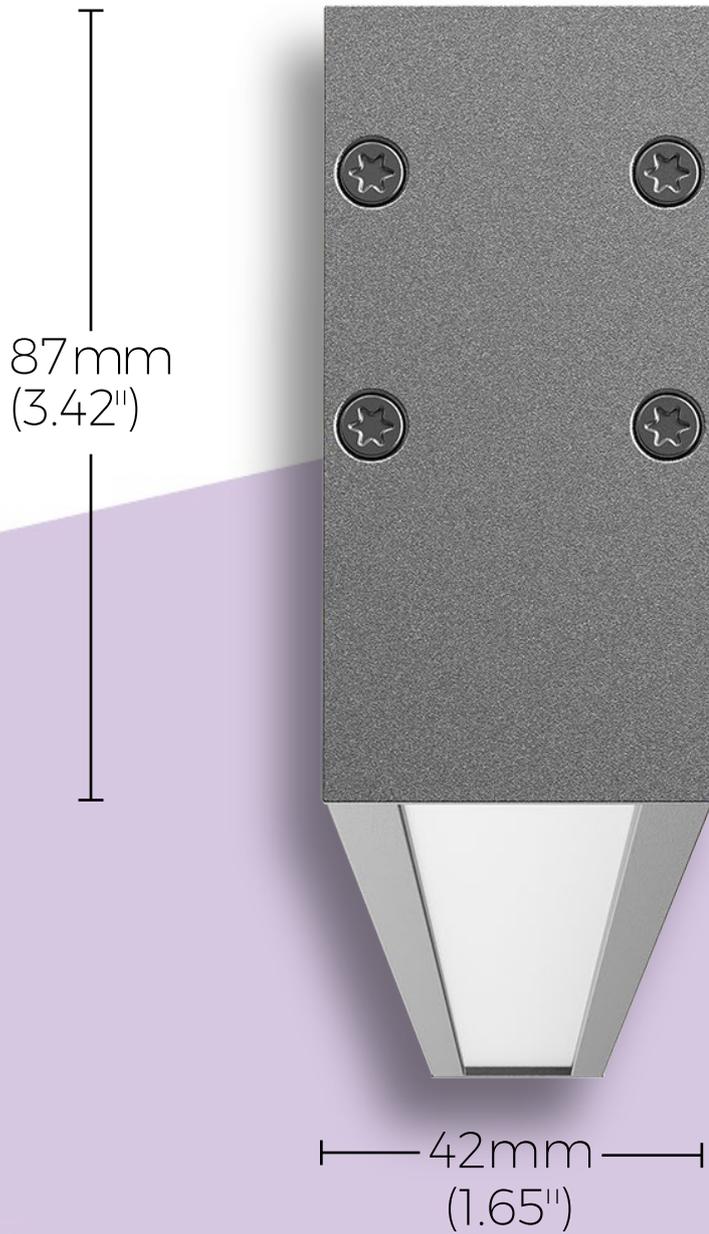

DATA TABLE


Output	4 Ft Length 120mm	Luminous Flux (Delivered Lumens)	LO	HO	
			1900	3500	
Output	Xeramix	CRI:	80+		
		Lumen Maintenance:	114,000 Hours (L90 B10 @ 50°) 1M hours (L70 B10 @50°C)		
	Proformax	CRI:	80+		
		Lumen Maintenance:	82,000 Hours (L80 B10 @ 25°)		
Warranty	Xeramix	Xeramix I = 10 years			
Electrical	Power Consumption	Between 20 and 45w/m			
	Voltage input range	120 - 277V			
	Control methods	Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Diming control DMX or DALI XI			
	Total harmonic distortion THD	9.8% max			
	Approvals	UL / CE / CCC / AS:NZS / EMC			
Physical	Dimensions	42mm (1.65") Wide x 87mm (3.42") High			
	Weight per metre	3.50Kg (7.71lbs) average weight			
	Housing	Aluminium Extrusion with silver powder-coat or selected powder-coated finish			
	Diffuser	Polycarbonate Opal Diffuser/ Clear Polycarbonate Diffuser			
	Connections	Optional polarised electrical connection between sections			
	Compatible ceiling type	Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings			
	Mounting	Field adjustable Rollerball Wire Suspensions / Surface Mounting / Custom Mounting / Rod Suspension / Wall Mounting			
	Joiner options	90° / Straight / Custom			
	Operating temperatures	Xeramix -25°C to 50°C (-13°F to 140°F)			
	Environment	Luminaire IP66 (Not in direct sunlight, diffuser must not face upwards).			
	IK rating	IK11			
	Minimum length adjustment	Xeramix = 25mm			
	LED Board types	Xeramix I boards and drivers in 25mm compatible / 100mm 280mm / and 560mm Zhaga compatible			
	Vandal Proof	Available with Anti-Vandal Fasteners			
	Optional Extras	Lanyards / Emergency packs / Environmental Plugs / Thermal throttle / IOT connectivity,			

XTI AVAILABLE LENGTHS



DESCRIPTION	LENGTHS										
total luminaire length in mm	578	858	1138	1418	1698	1978	2258	2538	2818	3098	3378
total luminaire length in inches	23	34	45	56	67	78	89	99	111	122	133
'560 board multiples	1.0	1.5	2.0	2.5	2.0	3.5	4.0	4.5	4.5	5.5	6.0

EXAMPLE OF STANDARD LENGTH COMBINATION

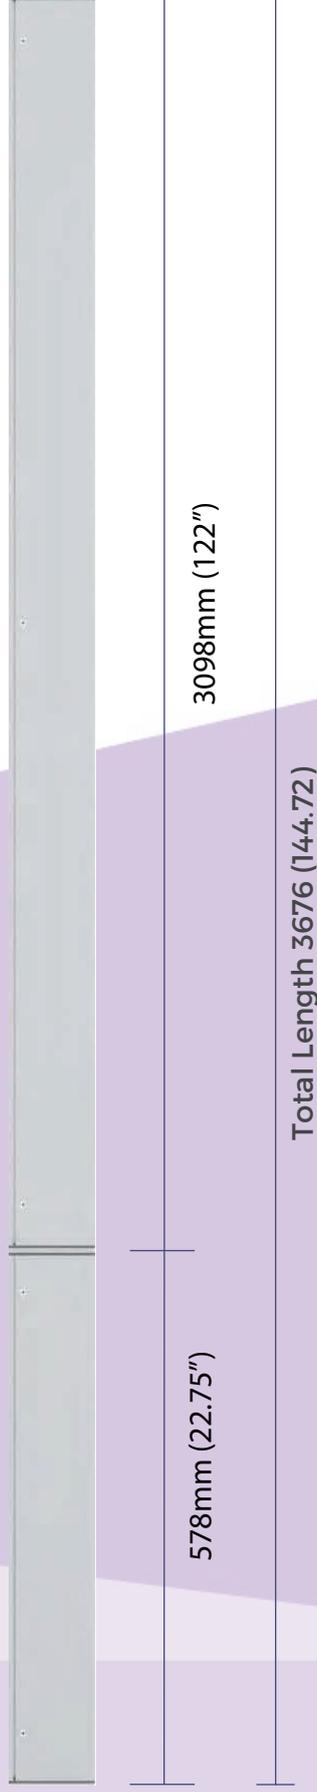

CREATING LENGTHS WITH XTI | 1.5 Slot IP66 IK11

The XTI | 1.5 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.

Note: custom lengths are also available – please consult your local Xero office for information

The XTI | 4.0 IP66 IK11 set lengths can be coupled together in any combination to achieve the desired length.


CUSTOM LENGTHS

Custom lengths are available in 0.984" (25mm) increments

XTI | 1.5 Slot
IP66 | IK11

Optical control

diffuser option



Clear
Polycarbonate



XM3
Canopy Kit
(not IP66
rated)



Vandal proof
option



Emergency
packs