XERO
Linear Lighting Systems

XERO TECHNOLOGY ADVANCED XTA

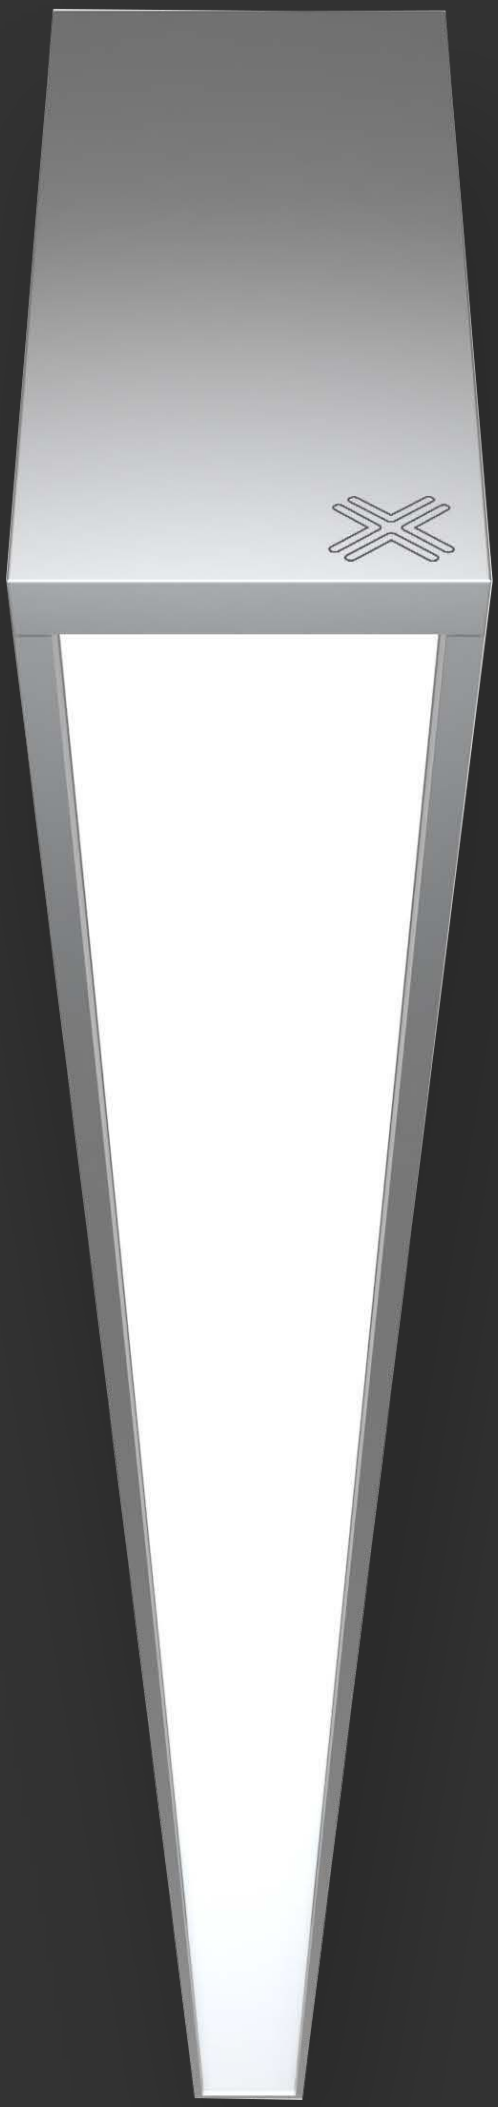

XTA | 2.0 Beam

metric	60mm Wide x 91mm High
imperial	2.36″ Wide x 3.58″ High

*LINEAR OPTIK OPTION

LOW UGR OPTION

ADVANCED INDUSTRY BEST 10 YEAR WARRANTY

*NOTE: The Linear OPTIK diffuser series is only available for IP20 Profiles and is **not** available for IP55 Profiles

DATA TABLE

LED Engine	**4ft Length 1120mm**	**Luminous Flux (Delivered Lumens)**	**LO 1900**	**HO 3500**	
	Xeramix	CRI	80+		
		Lumen Maintenance:	114,000 Hours (L90 B10 @ 50°)		
	Proformax Proformax S	CRI	90+		
		Lumen Maintenance:	82,000 Hours (L80 B10 @ 35°)		
Warranty	Xeramix		10 years		
	Proformax / Proformax S		7 years		
Electrical	Power Consumption		Between 20 and 45w/m		
	Voltage input range		120 – 277V		
	Control methods		Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI XI		
	Total harmonic distortion THD		9.8% max		
	Approvals		UL / CE / CCC / AS:NZS / EMC		
Physical	Dimensions		60mm Wide x 91mm High (2.36" x 3.58")		
	Weight per metre		6.1kg (13.4lbs) average weight		
	Distribution		Symmetric		
	Housing		Aluminium Extrusion with: Standard – silver powder-coat, black or white textured, (or) optional selected powder-coated finish		
	Upward Diffuser		Plexiglass * Linear OPTIK series: includes 40° Beam, 60° Beam, 70° Beam, 90° Beam, 110° Wide Beam, 145° Extra Wide Beam, 165° Extra Wide Beam, Asymmetric Beam, Double Asymmetric Beam * NOTE: NOT AVAILABLE IN IP55		
	Downward Diffuser		PlexiGlass / Low UGR Plexiglass / Opal Polycarbonate / Microprism / Optic white louvre / Semi specular louvre * Linear OPTIK series: includes 40° Beam, 60° Beam, 70° Beam, 90° Beam, 110° Wide Beam, 145° Extra Wide Beam, 165° Extra Wide Beam, Asymmetric Beam, Double Asymmetric Beam * NOTE: NOT AVAILABLE IN IP55		
	Connections		Speed connect joining system with the polarised electrical connection between sections		
	Compatible ceiling type		Suitable for gyprock (drywall) ceilings, metal pan, concrete, timber and T-bar grid ceilings		
	Mounting		Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount		
	Joiner options		Lit corner 90°/ Cross 90°/ Tee 90°/ Straight 180° Join		
	Operating temperatures		Xeramix = -25°C to 50°C (-13°F to 140°F) Proformax = -25°C to 35°C (-13°F to 95°F) Proformax S = -25°C to 35°C (-13°F to 95°F)		
	Environment		(IP20) – Dry indoor applications only | (IP55) – Not in direct sunlight		
	Minimum length adjustment		Xeramix = 1mm, Proformax = 25mm, Proformax S = 140mm		
	LED Board types		Xeramix LED boards in 25mm / 100mm / 280mm / 560mm lengths Zhaga compatible Proformax LED boards in 50mm / 280mm / 560mm lengths Zhaga compatible Proformax S LED boards in 140mm / 280mm / 560mm lengths Zhaga compatible		

XERO Linear Lighting Systems

XERO TECHNOLOGY ADVANCED XTA

XTA | 2.0 Beam

IP20 | Indoor series

Optical control

All XTA profiles come with many diffuser options for glare control in any application



*Linear OPTIK



Low UGR plexiglass



Polycarbonate



Plexiglass



Microprism



Optic white louvre

LINEAR OPTIK | *Beam angles

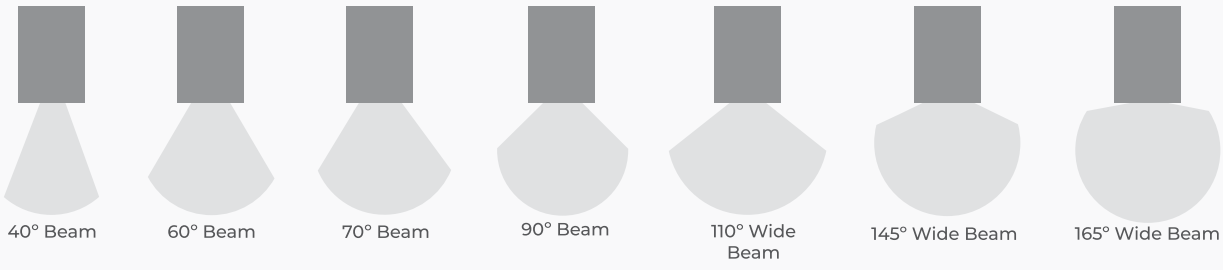



Note: Linear OPTIK Diffusers are available for the Beam profile in both Indirect & Direct options.

For more information talk with your Specification Consultant by going to xerolighting.com/contact



Note: Linear OPTIK diffusers are not available in IP55 product versions

Accessories and options



XM3 Canopy Kit



sensors / daylight harvesting



emergency packs



downlights