

XTI | 3.0 G WF Recessed

(with 10mm glass lens)
80mm Wide (116mm Wide inc flange)
x 84mm High
IP66 | IK10



THIS IS A SPECIAL ORDER

Thank you for considering this Special Order Product. Please note that this product may require a longer lead time and minimum order quantity. For more detailed information on this profile, we recommend speaking with your local Xero Specification Consultant. Visit xerolighting.com/contact for further assistance

10mm Lens




XTI | 3.0 G WF Recessed

Output	4ft Length 1120mm	Luminous Flux (Delivered Lumens)	LO	HO	
			1900	3500	
	Xeramix	CRI	80+		
		Lumen Maintenance	114,000 hours [L90 B10 @ 50°C]		
	Proformax Proformax S	CRI	80+		
		Lumen Maintenance	82,000 hours [L80 B10 @ 25°C]		
Warranty	Xeramix		Xeramix 1 = 10 years, Xeramix R = 15 Years		
	Proformax / Proformax S		7 years		
Electrical	Power Consumption		Between 20 and 45w/m		
	Voltage input range		120 – 277V		
	Control methods		Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI XI		
	Total harmonic distortion THD		9.8% max		
	Approvals		UL / CE / CCC / AS:NZS / EMC		
Physical	Dimensions		80mm Wide (including flanges 116mm Wide) x 80mm High		
	Weight per metre		4.3kg (9.47lbs) average weight		
	Housing		Aluminium Extrusion with: Standard – silver powder-coat, black or white textured, (or) optional selected powder-coated finish		
	Diffuser		Opaque Polycarbonate Diffuser / Clear Polycarbonate Diffuser / Louvres available in White, Black, or Silver		
	Connections		Optional polarised electrical connection between sections. Power feed through end-plate or rear of housing. An additional minimum 45mm is required for gland and flex to turn through 90°		
	Compatible ceiling type		Suitable for gyprock (drywall) ceilings, metal pan, concrete, timber and T-bar grid ceilings		
	Mounting		Recessed Flange Mounted, Sliding Thread Stud Bracket, Sliding Surface Mounting Plate, Wire Suspension Kit		
	Joiner options		Joiners available for interconnection		
	Operating temperatures		Xeramix = -25°C to 50°C (-13°F to 140°F) Proformax = -25°C to 35°C (-13°F to 95°F) Proformax S = -25°C to 35°C (-13°F to 95°F)		
	Environment		IP66 (not in direct sunlight) (diffuser must not face upwards)		
	Minimum length adjustment		25mm		
	LED board types		Xeramix 1 and Xeramix R Boards and drivers in 25mm compatible / 100mm 280mm and 560mm Zhaga lengths Proformax LED boards in 50mm / 280mm / 560mm lengths Zhaga compatible Proformax S LED boards in 140mm / 280mm / 560mm lengths Zhaga compatible		
	IK rating		IK11		
	Vandal-proof		Available with anti-vandal fasteners		
	Optional extras		Lanyards / Emergency packs / Camera / Environmental plugs / Thermal throttle / IOT connectivity		

XTI | 3.0 G WF Recessed

Example of standard length combination

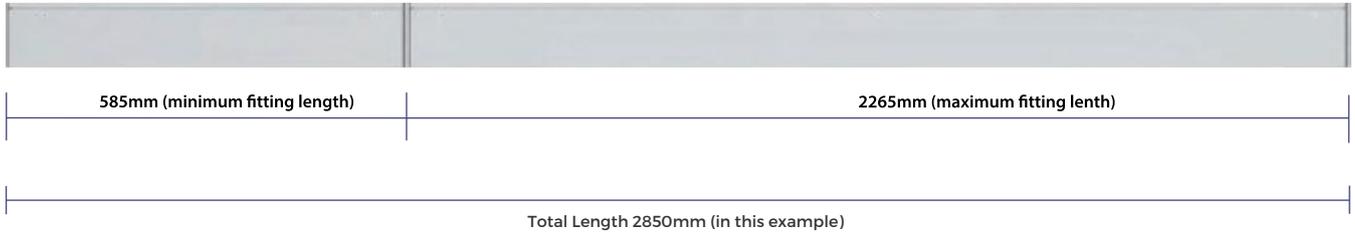

CREATING LENGTHS WITH XTI | 3.0 G WF Recessed IP66 | IK10

The XTI | 3.0 IP66|IK10 set lengths can be coupled together in any combination to achieve the desired length.

Note: custom lengths are also available – please consult your local Xero office for information

The XTI | 3.0 IP66 IK10 set lengths can be coupled together in any combination to achieve the desired length.

CUSTOM LENGTHS

Custom lengths are available in 0.984" (25mm) increments

Note: The above measurements do not include flange width

Optical control


XTI profiles come with many diffuser options for glare control in any application



10mm
Toughened Glass
& White Louvre



10mm
Toughened Glass
& Black Louvre



10mm
Toughened Glass
& Silver Louvre



10mm
Toughened Glass
& Frosted
Acrylic Plexiglass

Accessories



XM3
Canopy Kit



Vandal proof
option



EWIS speaker
option



Emergency
packs