

2026



PRODUCT RANGE



PRECONFIGURED PROFILES

ORBIT Preconfigured Series




DOWNLOAD
ORBIT PRECONFIGURED
BROCHURE

OPTIK DOWNLIGHTS



DOWNLOAD
OPTIK DOWNLIGHTS
BROCHURE


XTA | 1.5 Series

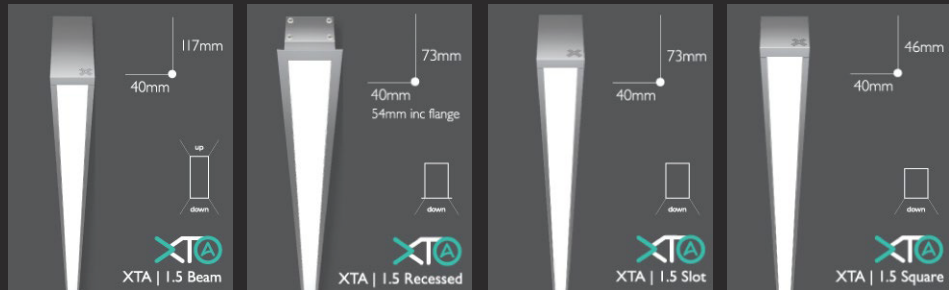


XTA | 1.6 OPTIK Series




XTA | 2.0 Series

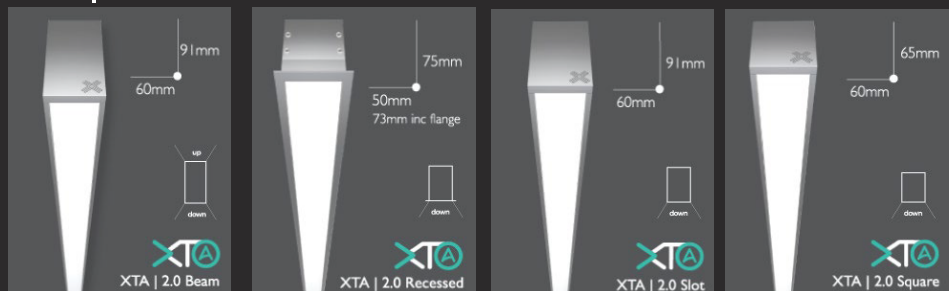


XTA | 2.0 EDGE Series

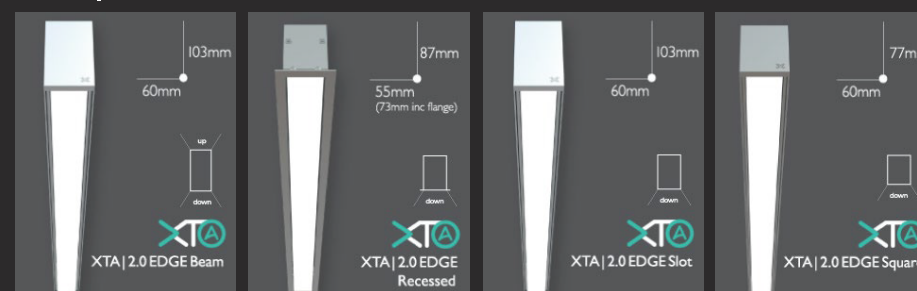

XTA | 3.0 Series

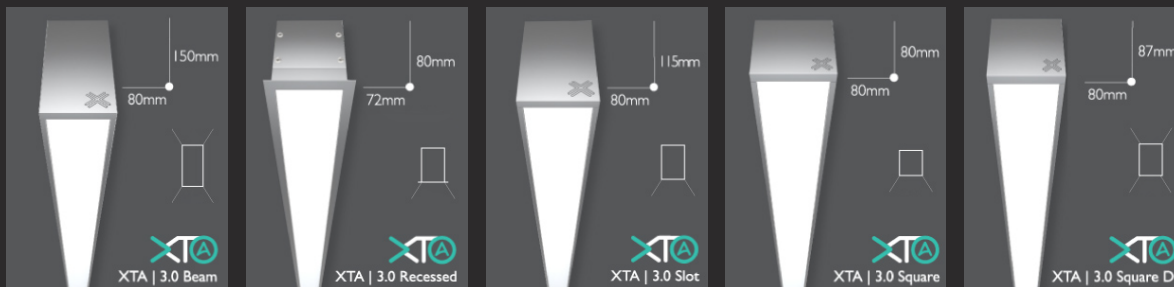

XTA | 4.0 Series

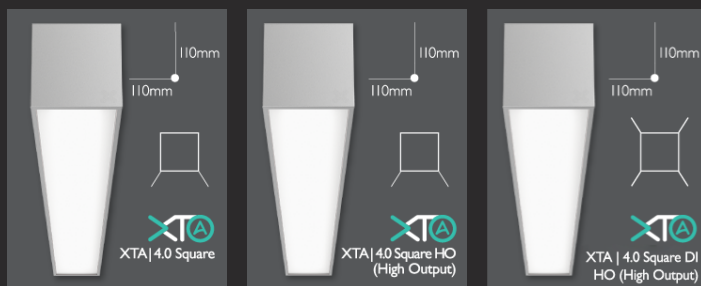

Xero Linear Lighting Systems introduces the Xero Technology Advanced (XTA) series.


XTA brings together the best available technology in any linear system. This includes 'LumiSEAL' a complete light leak free system that incorporates 'conSEAL' a patented end plate system with hidden gaskets in all IP versions and 'speed-connect' a fast easy to assemble tool-less joining system that minimises time and additional labour. The technologically advanced XTA series also includes 'AXIS' a unique gear tray system that is completely up-gradable and removable that allows LED components to be easily accessed for end of

life replacement or maintenance. The XTA series uses Xero's exclusive boards and drivers - 'Xeramix - one' that has unmatched colour quality throughout life includes combined HE/ HO board with to L90 B10 I14,000k hours @ 50°C. UL/CE/AUS/NZS Standards approved Universal I20-277v input, site selectable drive current for variable output on-the-fly'. Partner this with the high end details such as laser etched CNC machined end plates, micro prism diffuser with UGR79 and high LOR white optic louvres and dot free diffusion options and excellent thermal tolerance.

All this and an industry leading 70 Year Warranty unsurpassed by any linear lighting company

XTA | 2.0 Loop

XTA | 2.5 Loop Series



MULTI-BEAM
OPTIK



optical control downlights

LOOP extension with multi-lens options

Available as an optic system (Direct Only) across XTA | 2.5 LOOP and HyperLoop profiles (Slot, Recessed and Beam).
IP55 rated option available in XTA | 2.5 LOOP






PLAY VIDEO




BROCHURE

hyperLOOP™ | SERIES


XTA | HyperLoop Series



XTS | 2.0 Series

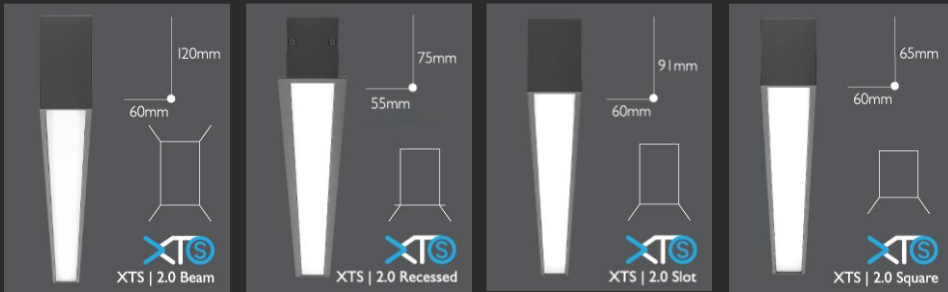

XTS | 3.0 Series

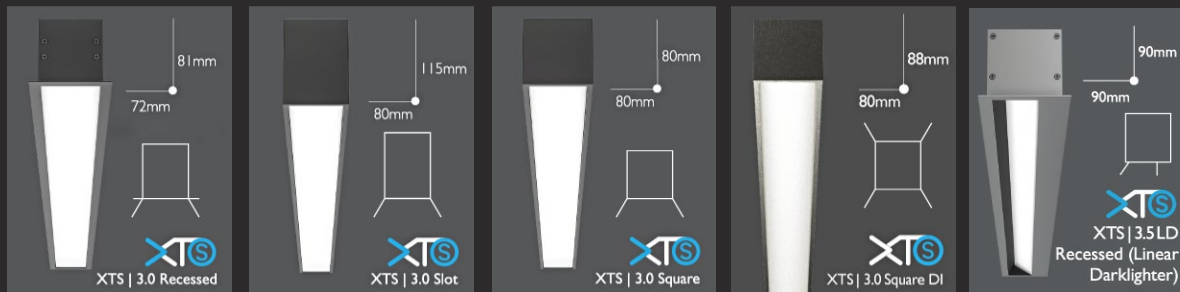

The XTS series combines the best available technology for all specification driven installations.


Features include -
 Proformax LED Light engines. HE and HO board options with L80 B10 82,000k hours @ 35 °C.
 Proformax boards are CRI 90 as standard.

UL/ CE/ AUS/ NZS standards approved




Universal 120-277v input
 Site selectable drive current variable output on-the-fly'

Axis removable gear tray system
 Unlit bends and joiners available
 The XTS series includes an industry leading 7 Year Warranty -unmatched at this price point





XTI | 1.5 SERIES




XTI | 2.0 SERIES



XTI | 3.0 SERIES



XTI | 4.0 SERIES



XTI brings together the best available technology for any linear lighting system specifically designed for the infrastructure segment.

UL/ CE/ AUS/NZS standards approved Universal 120-277v input, site selectable drive current for variable output 'on-the-fly'. Partner this with the high end details such as no visible face fixings, white optic louvres and dot free diffusion options and excellent thermal tolerance. All systems can be supplied with Polycarbonate that allows IK10+ impact kinetic rating and vandal proof fasteners.

Warranties

PROFORMAX RGBW



Xero Linear Lighting Systems extends an (industry leading) full 5 year warranty using Proformax RGBW light engines to the original purchaser for the XTA, XTI and XTS series of profiles. at L80 B10 @ 25°C. The evaluation method for luminous flux under this warranty shall follow the LM79 standard. Proformax RGBW boards are CRI 80 as standard.

PROFORMAX



Xero Linear Lighting Systems extends an (industry leading) full 7 year warranty using Proformax light engines to the original purchaser for the XTA and XTS series of profiles. For more information on warranty visit xerolighting.com/warranty L80 B70 82.000k hours @ 35°C. Proformax boards are CRI 90 as standard and have the highest efficiency currently on the market. The Proformax boards also have the lowest sulfurisation deterioration.

XERAMIX 1



Xero lighting Group XTA and XTI Luminaires use Xeramix I boards and TCI drivers and are conditionally warranted for a period of 70 Years at L90 B70 114,000k hours@ 50°C. The evaluation method for luminous flux under this warranty shall follow the LM79 standard.

XERAMIX R



Xero lighting Group Luminaires use Xeramix R boards and TCI drivers and are conditionally warranted for a period of 15 Years at L90 B70 114,000k hours @ 50°C. The evaluation method for luminous flux under this warranty shall follow the LM79 standard.