

XERO
TECHNOLOGY
ADVANCED 

XTA | 1.6 OPTIK Slot

metric

40mm Wide x 90mm High

imperial



1.574" Wide x 3.543" High



DATA TABLE

Optic Module LED Engine	4ft Length 1120mm	Luminous Flux (Delivered Lumens)	LO 1900	HO 3500	
	Xeramix	CRI	80+		
		Lumen Maintenance:	114,000 Hours (L90 B10 @ 50°)		
	Proformax Proformax S	CRI:	90+		
		Lumen Maintenance:	82,000 Hours (L80 B10 @ 35°)		
Warranty	Xeramix		10 years		
	Proformax / Proformax S		7 years		
Electrical	Power Consumption		Between 20 and 45w/m		
	Voltage input range		120 – 277V		
	Control methods		Dimming options for white light: 0-10V, DALI Dimming control: DALI		
	Total harmonic distortion THD		9.8% max		
	Approvals		UL / CE / CCC / AS/NZS / EMC		
Physical	Dimensions		40 X 90 mm		
	Weight per metre		3.5kg (7.7lbs) average weight		
	Housing		Aluminium Extrusion with: Standard – silver powder-coat, black or white textured, (or) optional selected powder-coated finish		
	Diffuser		Frosted acrylic lens / Polycarbonate lens		
	Optic module		Baffles are available in black and white, optic distributions available in Oval Beam Wall Washer, 18° Spot Beam, 28° Medium Beam, 52° Asymmetric Wide Beam, 64° Wide Beam and 60° Batwing Beam		
	Connections		Speed connect joining system with polarised electrical connection between sections		
	Compatible ceiling type		Suitable for gyprock (drywall) ceilings, metal pan, concrete, timber and T-bar grid ceilings		
	Mounting		Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount		
	Joiner options		Lit corner 90° Cross 90° Tee 90° straight 180° join		
	Operating temperatures		Xeramix = -25°C to 50°C (-13°F to 140°F) Proformax = -25°C to 35°C (-13°F to 95°F) Proformax S = -25°C to 35°C (-13°F to 95°F)		
	Environment		Dry indoor applications only		
	Minimum length adjustment		Xeramix = 1mm, Proformax = 25mm, Proformax S = 140mm		
	LED Board types		Xeramix LED boards in 25mm / 100mm / 280mm / 560mm lengths Zhaga compatible Proformax LED boards in 50mm / 280mm / 560mm lengths Zhaga compatible Proformax S LED boards in 140mm / 280mm / 560mm lengths Zhaga compatible		

dimensions of baffle

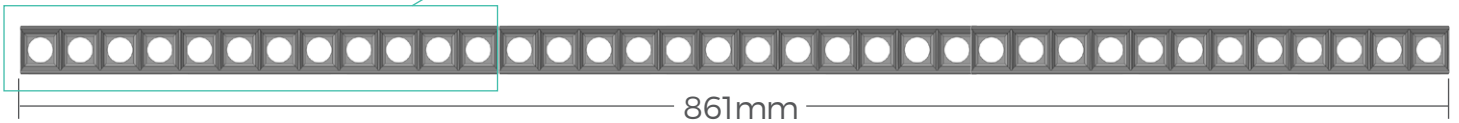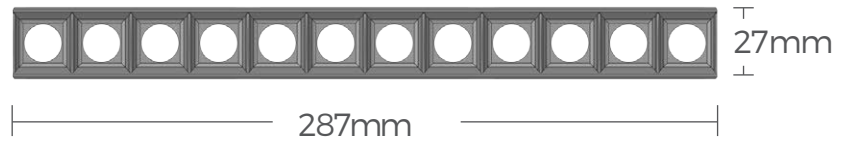

The OPTIK baffle can be arranged in a maximum of three modules then a minimum 50mm cover plate is required.

accessories



sensors / daylight
harvesting



emergency packs

bend options



135°



cross 90°



tee 90°



custom




corner 90°




ceiling to wall

optics


All XTA profiles come with many diffuser options for glare control in any application

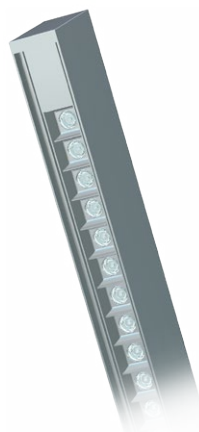


white baffle

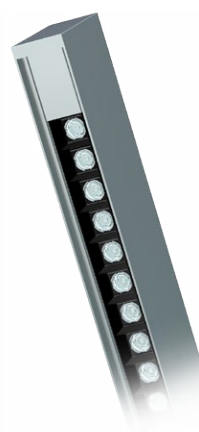

black baffle

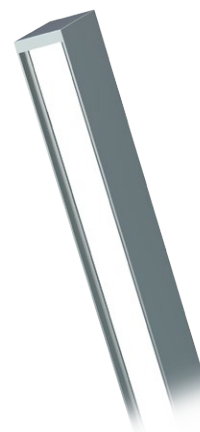

plexiglass

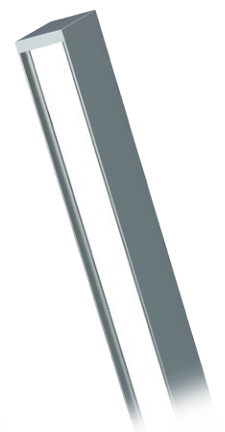

polycarbonate

Individually selectable optics


The OPTIK module lenses come as standard with one variant lens per each module of 12. Although each lens can be individually configured and customised to suit your desired light configuration.

Optic lens options

- 18° Spot Beam
- 28° Medium Beam
- 52° Asymmetric Wide Beam
- 64° Wide Beam
- 60° Batwing Beam
- Oval Beam Wall Washer

Beam angles

The OPTIK profile gives you the ability to create custom angles to suit specific design requirements that can be applied to various applications including retail, office and residential environments

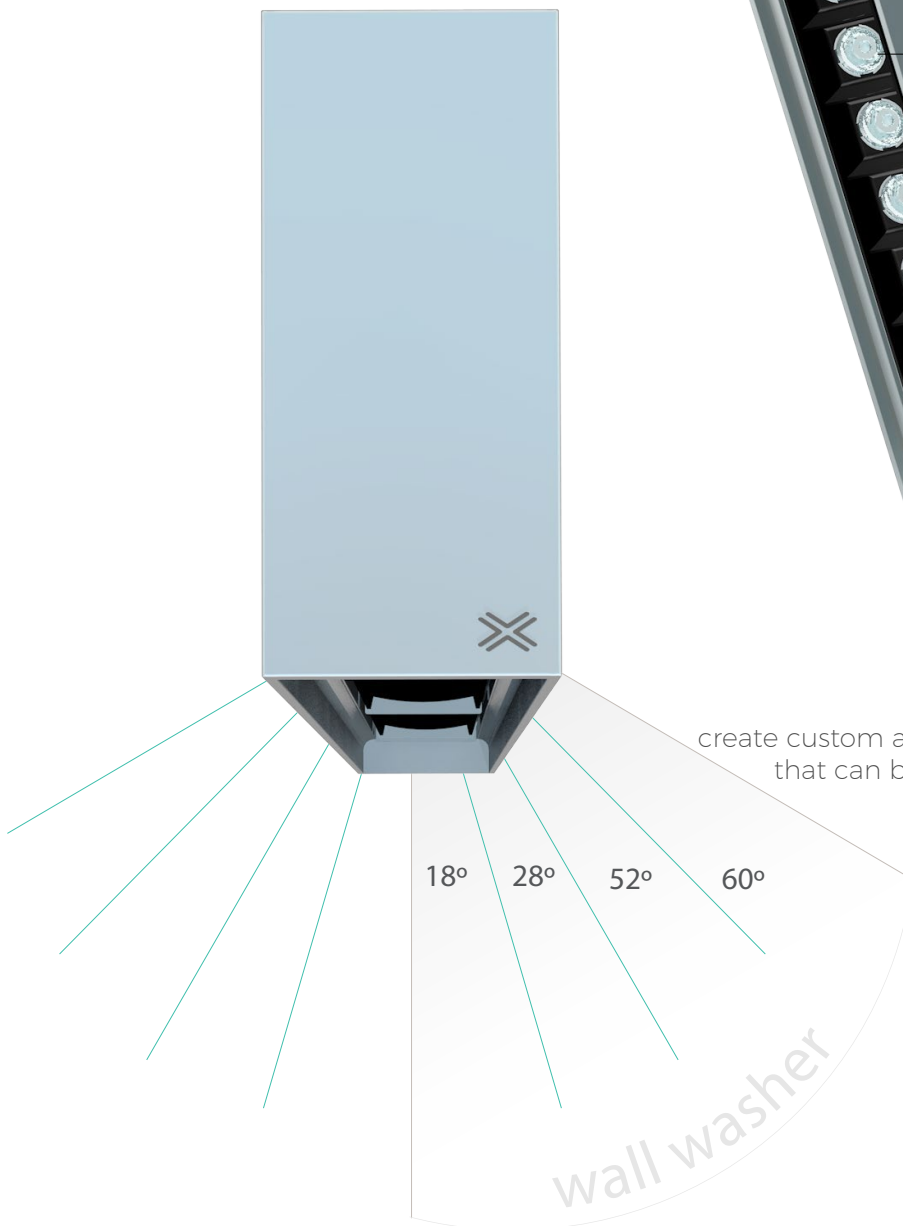

OPTIK profile configurations

