


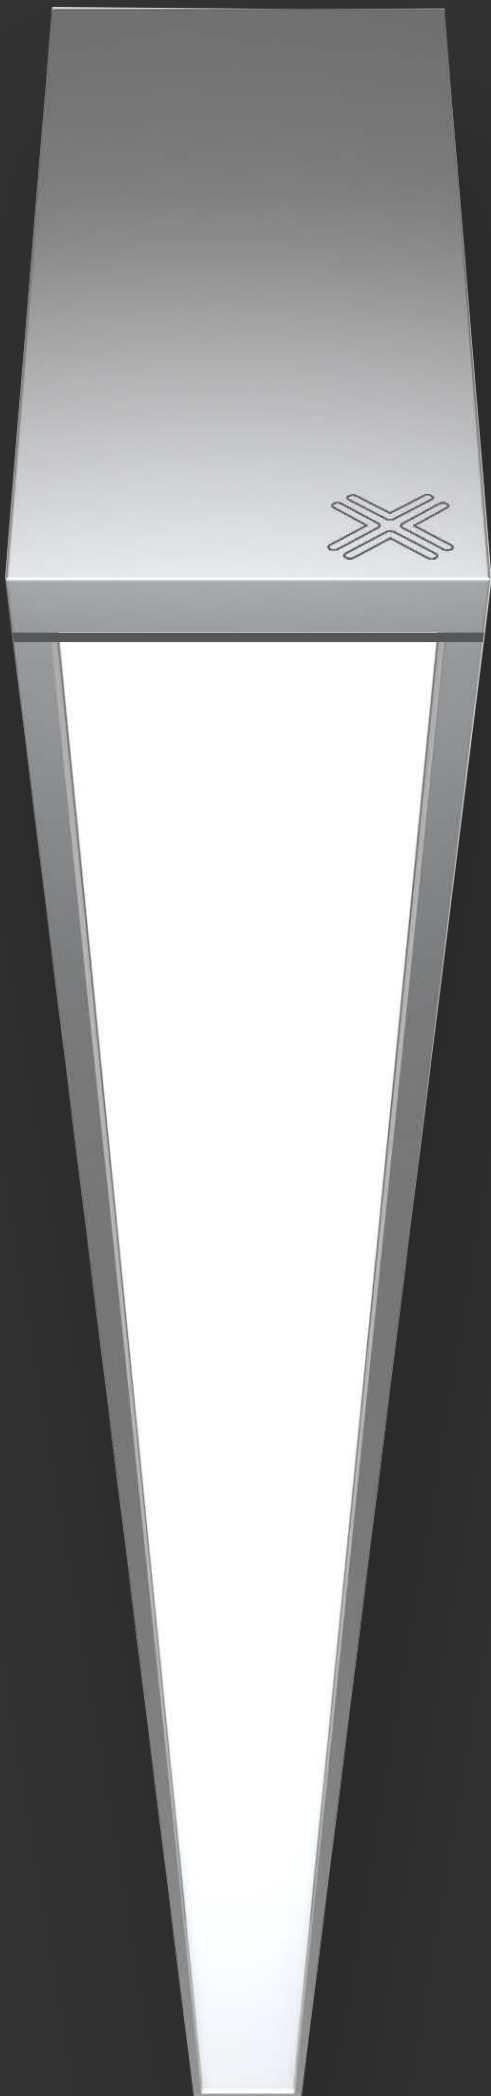

XERO
TECHNOLOGY
ADVANCED 

XTA | 2.0 Beam IP55

metric

60mm Wide x 91mm High

imperial

2.36" Wide x 3.58" High



DATA TABLE

LED Engine	4ft Length 1120mm	Luminous Flux (Delivered Lumens)	LO 1900	HO 3500	
	Xeramix	CRI	80+		
		Lumen Maintenance:	114,000 Hours (L90 B10 @ 50°)		
	Proformax	CRI	90+		
	Proformax S	Lumen Maintenance:	82,000 Hours (L80 B10 @ 35°)		
	24V RGBW System		Dual Row (DALI / DMX Dimming)		
Warranty	Xeramix		10 years		
	Proformax / Proformax S		7 years		
Electrical	24V RGBW		3 years		
	Power Consumption		Between 20 and 45w/m		
	Voltage input range		120 – 277V		
	Control methods		Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI X / Dimming options for RGBW; DALI, DMX		
	Total harmonic distortion THD		9.8% max		
Physical	Approvals		UL / CE / CCC / AS/NZS / EMC		
	Dimensions		60mm Wide x 91mm High (2.36" x 3.58")		
	Weight per metre		6.1kg (13.4lbs) average weight		
	Distribution		Symmetric		
	Housing		Aluminium Extrusion with: Standard – silver powder-coat, black or white textured, (or) optional selected powder-coated finish		
	Upward Diffuser		Plexiglass * Linear OPTIK series: includes 40° Beam, 60° Beam, 70° Beam, 90° Beam, 110° Wide Beam, 145° Extra Wide Beam, 165° Extra Wide Beam, Asymmetric Beam, Double Asymmetric Beam * NOTE: NOT AVAILABLE IN IP55		
	Downward Diffuser		PlexiClass / Low UGR Plexiglass / Opal Polycarbonate / Microprism /Louvers available in White, Black, or Silver * Linear OPTIK series: includes 40° Beam, 60° Beam, 70° Beam, 90° Beam, 110° Wide Beam, 145° Extra Wide Beam, 165° Extra Wide Beam, Asymmetric Beam, Double Asymmetric Beam * NOTE: NOT AVAILABLE IN IP55		
	Connections		Speed connect joining system with the polarised electrical connection between sections		
	Compatible ceiling type		Suitable for gyprock (drywall) ceilings, metal pan, concrete, timber and T-bar grid ceilings		
	Mounting		Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount		
	Joiner options		Lit corner 90° Cross 90° Tee 90° Straight 180° Join		
	Operating temperatures		Xeramix = -25°C to 50°C (-13°F to 140°F) 24V RGBW – (20°C to 35°C) Proformax = -25°C to 35°C (-13°F to 95°F) Proformax S = -25°C to 35°C (-13°F to 95°F)		
	Environment		(IP20) – Dry indoor applications only (IP55) – Not in direct sunlight		
	Minimum length adjustment		Xeramix = 1mm, Proformax = 25mm, Proformax S = 140mm		
	LED Board types		Xeramix LED boards in 25mm / 100mm / 280mm / 560mm lengths Zhaga compatible Proformax LED boards in 50mm / 280mm / 560mm lengths Zhaga compatible Proformax S LED boards in 140mm / 280mm / 560mm lengths Zhaga compatible		
			compatible		

XTA | 2.0 EDGE Beam IP55

Optical control(up)

All XTA profiles come with many diffuser options for glare control in any application



plexiglass

Optical control(down)



low UGR
plexiglass



polycarbonate




plexiglass




microprism


Accessories and options



sensors / daylight
harvesting



emergency packs



downlights