

XERO
TECHNOLOGY
ADVANCED




XTA|4.0 Square D/I | H/O

(High Output)
indoor only IP20

Metric: 110mm Wide x 110mm High

Imperial: 4.330" Wide x 4.330" High

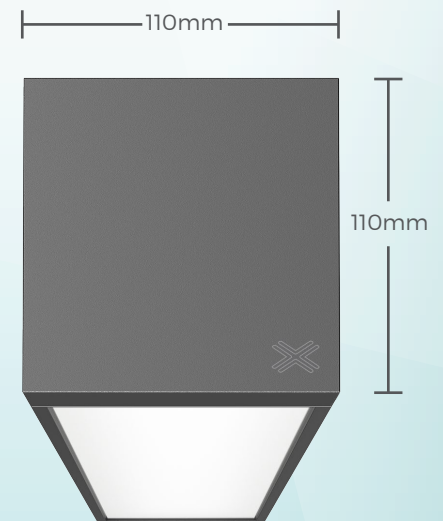

Xero Linear Lighting Systems
General Enquiries
P: +61 2 8599 9788
E: headoffice@xerolighting.com



XTA | 4.0 Square D/I | H/O

Output	4ft Length 1120mm	Luminous Flux (Delivered Lumens)	LO 4300	HO 8000	
	Xeramix	CRI	80+		
		Lumen Maintenance:	114,000 Hours (L90 B10 @ 50°)		
	Proformax	CRI:	90+		
		Lumen Maintenance:	82,000 Hours (L80 B10 @ 35°)		
	24V RGBW System		Dual Row (DALI / DMX Dimming)		
Warranty	Xeramix		10 Years		
	Proformax		7 Years		
	24V RGBW		3 years		
Electrical	Power Consumption		Between 20 and 45w/m		
	Voltage input range		120 – 277V		
	Control methods		Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI XI / Dimming options for RGBW; DALI, DMX		
	Total harmonic distortion THD		9.8% max		
	Approvals		UL / CE / CCC / AS:NZS / EMC		
Physical	Dimensions		110 x 110mm		
	Weight per metre		5.7kg (12.56lbs) average weight		
	Housing		Aluminium Extrusion with standard silver powder-coat, black or white textured, (or) optional selected powder-coated finish		
	End Plates		Consealed magnetic end plates		
	Upward diffuser		PlexiGlass as standard / Optional – Asymmetric Lens / Extra Wide Beam Lens		
	Downward diffuser		PlexiGlass		
	Connections		Speed connect joining system with polarised electrical connection between sections		
	Compatible ceiling type		Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings		
	Mounting		Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount		
	Joiner options		lit corner 90°/ Cross 90°/ Tee 90°/ Straight 180° Join		
	Operating temperatures		Xeramix = -25°C to 50°C (-13°F to 140°F) 24V RGBW – (20°C to 35°C) Proformax = -25°C to 35°C (-13°F to 95°F)		
	Environment		(IP20) – Dry indoor applications only (IP55) – Not in direct sunlight		
	Minimum length adjustment		Xeramix = 1mm Proformax = 25mm		
	LED board types		Xeramix LED boards in 25 / 100 / 280 / 560mm lengths Zhaga compatible Proformax LED boards in 50 / 280 / 560mm lengths Zhaga compatible		

XTA | 4.0 Square D/I | H/O

Bend Options



135°



cross 90°



Tee 90°



custom




corner 90°




ceiling to wall

Performance Optional

Optical control Up (only)



Extra Wide
Beam Lens



Asymmetric
Lens

Standard Optical Control Down & Up



plexiglass



Accessories and options



sensors / daylight
harvesting



emergency packs



downlights

Rollerball Suspension

The smart suspension system that can be mounted on any surface whether a flat or sloped ceiling or even a wall

Axis geartray

This truly unique innovation adopts our revolutionary cam lock for quick and simple 'single person' installation. The system is also 'future proofed' by having the ability to easily upgrade as LED technology rapidly advances.

