



## XTA | 4.0 Square HO (High Output)

indoor only IP20

**Metric:** 110mm Wide x 110mm High

**Imperial:** 4.330 Wide x 4.330 High




Xero Linear Lighting Systems  
General Enquiries  
P: +61 2 8599 9788  
E: [headoffice@xerolighting.com](mailto:headoffice@xerolighting.com)



## XTA | 4.0 Square HO

| Output     | 4ft Length<br>1120mm          | Luminous Flux<br>(Delivered Lumens) | LO<br>4300                                                                                                                                   | HO<br>8000 |  |
|------------|-------------------------------|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|------------|--|
|            | Xeramix                       | CRI                                 | 80+                                                                                                                                          |            |  |
|            |                               | Lumen Maintenance:                  | 114,000 Hours ( L90 B10 @ 50° )                                                                                                              |            |  |
|            | Proformax                     | CRI:                                | 90+                                                                                                                                          |            |  |
|            |                               | Lumen Maintenance:                  | 82,000 Hours ( L80 B10 @ 35° )                                                                                                               |            |  |
|            | 24V RGBW System               |                                     | Dual Row ( DALI / DMX Dimming )                                                                                                              |            |  |
| Warranty   | Xeramix                       |                                     | 10 Years                                                                                                                                     |            |  |
|            | Proformax                     |                                     | 7 Years                                                                                                                                      |            |  |
|            | 24V RGBW                      |                                     | 3 years                                                                                                                                      |            |  |
| Electrical | Power Consumption             |                                     | Between 20 and 45w/m                                                                                                                         |            |  |
|            | Voltage input range           |                                     | 120 – 277V                                                                                                                                   |            |  |
|            | Control methods               |                                     | Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI XI / Dimming options for RGBW; DALI, DMX |            |  |
|            | Total harmonic distortion THD |                                     | 9.8% max                                                                                                                                     |            |  |
|            | Approvals                     |                                     | UL / CE / CCC / AS:NZS / EMC                                                                                                                 |            |  |
| Physical   | Dimensions                    |                                     | 110 x 110mm                                                                                                                                  |            |  |
|            | Weight per metre              |                                     | 5.7kg (12.56lbs) average weight                                                                                                              |            |  |
|            | Housing                       |                                     | Aluminium Extrusion with standard silver powder-coat, black or white textured, (or) optional selected powder-coated finish                   |            |  |
|            | End Plates                    |                                     | Consealed magnetic end plates                                                                                                                |            |  |
|            | Upward diffuser               |                                     | PlexiGlass as standard / Optional – Asymmetric Lens / Extra Wide Beam Lens                                                                   |            |  |
|            | Downward diffuser             |                                     | PlexiGlass                                                                                                                                   |            |  |
|            | Connections                   |                                     | Speed connect joining system with polarised electrical connection between sections                                                           |            |  |
|            | Compatible ceiling type       |                                     | Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings                                                           |            |  |
|            | Mounting                      |                                     | Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount                                               |            |  |
|            | Joiner options                |                                     | lit corner 90°/ Cross 90°/ Tee 90°/ Straight 180° Join                                                                                       |            |  |
|            | Operating temperatures        |                                     | Xeramix = -25°C to 50°C (-13°F to 140°F) 24V RGBW – (20°C to 35°C)<br>Proformax = -25°C to 35°C (-13°F to 95°F)                              |            |  |
|            | Environment                   |                                     | (IP20) – Dry indoor applications only   (IP55) – Not in direct sunlight                                                                      |            |  |
|            | Minimum length adjustment     |                                     | Xeramix = 1mm Proformax = 25mm                                                                                                               |            |  |
|            | LED board types               |                                     | Xeramix LED boards in 25 / 100 / 280 / 560mm lengths Zhaga compatible<br>Proformax LED boards in 50 / 280 / 560mm lengths Zhaga compatible   |            |  |

## XTA | 4.0 Square HO Dimensions

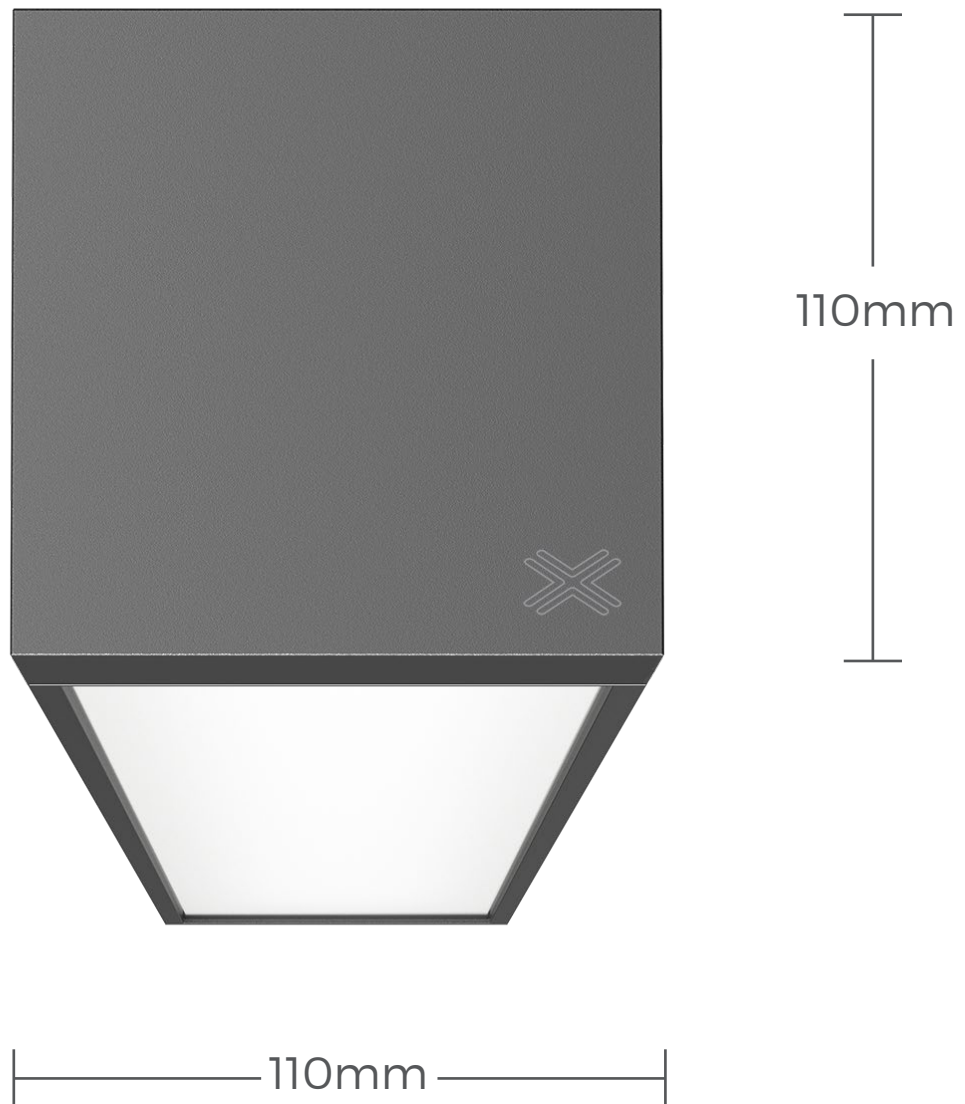

## XTA | 4.0 Square HO

### Bend Options



135°



cross 90°



Tee 90°



custom



corner 90°



ceiling to wall

### Optical Control



PlexiGlass



### Accessories and options



sensors / daylight  
harvesting



emergency packs



downlights

### Rollerball Suspension

The smart suspension system that can be mounted on any surface whether a flat or sloped ceiling or even a wall

### Axis geartray

This truly unique innovation adopts our revolutionary cam lock for quick and simple 'single person' installation. The system is also 'future proofed' by having the ability to easily upgrade as LED technology rapidly advances.

