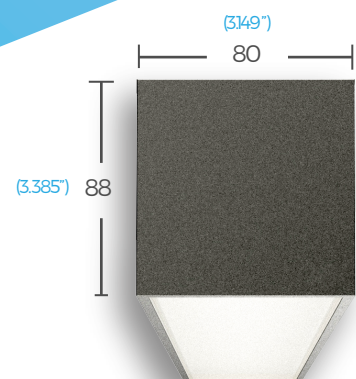
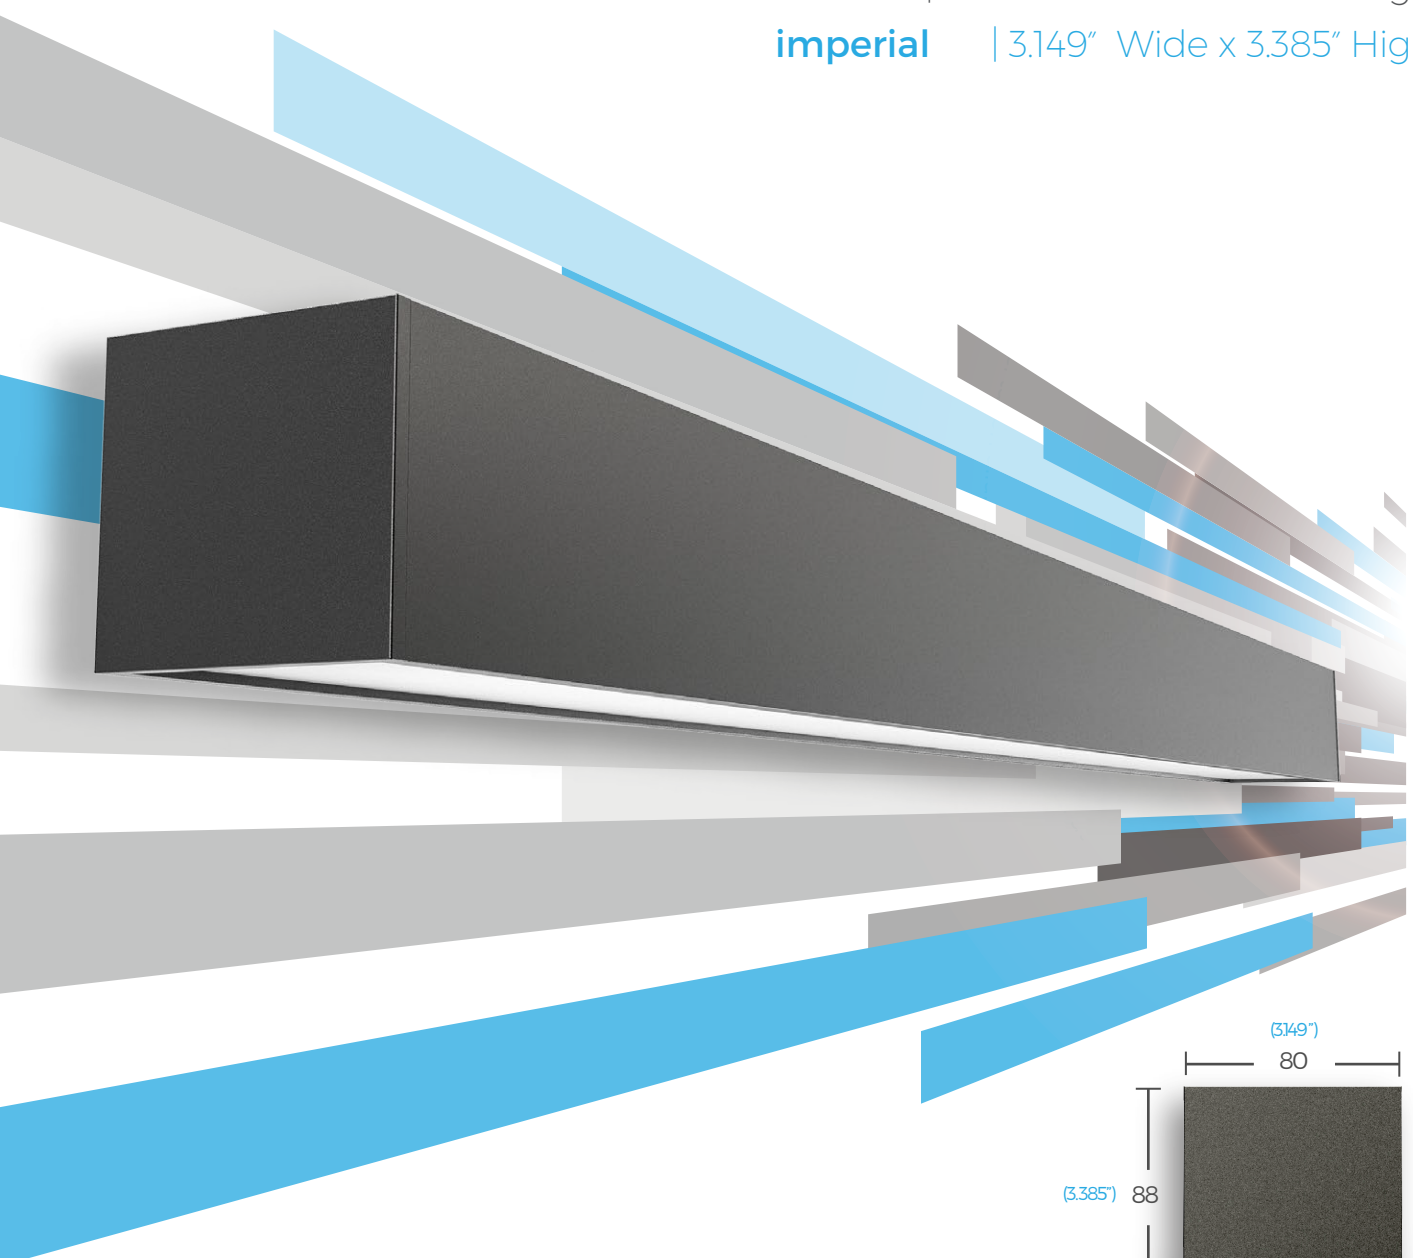


XTS | 3.0 Square D/I

metric | 80mm Wide x 86mm High

imperial | 3.149" Wide x 3.385" High



*Illustration above shows 'optional' screw-less endplate

Xero Linear Lighting Systems

General Enquiries

P: +61 2 8599 9788

E: headoffice@xerolighting.com



XTS | 3.0 Square D/I

DATA TABLE

Output	4ft Length 1120mm	Luminous Flux (Delivered Lumens)	LO 1900	HO 3500	
	CRI		90+		
	Lumen Maintenance		82,000 hours (L80 B10 @ 35°)		
	24V RGBW System		Dual Row (DALI / DMX Dimming)		
Warranty	Proformax / Proformax S		7 Years		
	24V RGBW		3 years		
Electrical	Power Consumption		Between 20 and 45w/m		
	Voltage input range		120 – 277V		
	Control methods		Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Diming control DMX or DALI XI / Dimming options for RGBW; DALI, DMX		
	Total harmonic distortion THD		9.8% max		
	Approvals		UL / CE / CCC / AS:NZS / EMC		
Physical	Dimensions		80mm W x 86mm H (3.149"W x 3.385"H)		
	Endplates		Screwed End Plates (Standard) / Screw-Less End Plates (Optional)		
	Weight per metre		3.21kg (7lbs) average weight		
	Housing		Aluminium Extrusion with standard silver powder-coat, black or white textured, (or) optional selected powder-coated finish		
	Upward diffuser		Standard – Frosted acrylic lens Optional – Asymmetric Lens / Extra Wide Beam Lens		
	Downward diffuser		Frosted acrylic lens		
	Connections		Polarised electrical connection between sections		
	Compatible ceiling type		Suitable for drywall ceilings, metal pan, concrete, timber and T bar grid ceilings		
	Mounting		Field adjustable rollerball wire suspensions / rod suspensions / wall mounting /surface mount		
	Joiner options		Lit corner 90° / Cross 90° / Tee 90° / Straight 180° join		
	Operating temperatures		Proformax = -25°C to 35°C (-13°F to 95°F) 24V RGBW – (20°C to 35°C) Proformax S = -25°C to 35°C (-13°F to 95°F)		
	Environment		Dry indoor applications only		
	Minimum length adjustment		Proformax = 50mm, Proformax S = 140mm		
	LED board types		Proformax LED boards in 50mm / 280mm / 560mm lengths Zhaga compatible Proformax S LED boards in 140mm / 280mm / 560mm lengths Zhaga compatible		



Xero Linear Lighting Systems

General Enquiries
P: +61 2 8599 9788
E: headoffice@xerolighting.com



XTS | 3.0 Square D/I

Bend Options



135°



cross 90°



Tee 90°



custom




corner 90°




ceiling to wall

Performance Optional

Optical control Up (only)



Extra Wide
Beam Lens



Asymmetric
Lens

Standard Optical Control Down & Up



plexiglass



Accessories and options



sensors / daylight
harvesting



emergency packs



downlights

Rollerball Suspension

The smart suspension system that can be mounted on any surface whether a flat or sloped ceiling or even a wall

Axis geartray

This truly unique innovation adopts our revolutionary cam lock for quick and simple 'single person' installation. The system is also 'future proofed' by having the ability to easily upgrade as LED technology rapidly advances.



Xero Linear Lighting Systems

General Enquiries
P: +61 2 8599 9788
E: headoffice@xerolighting.com

