


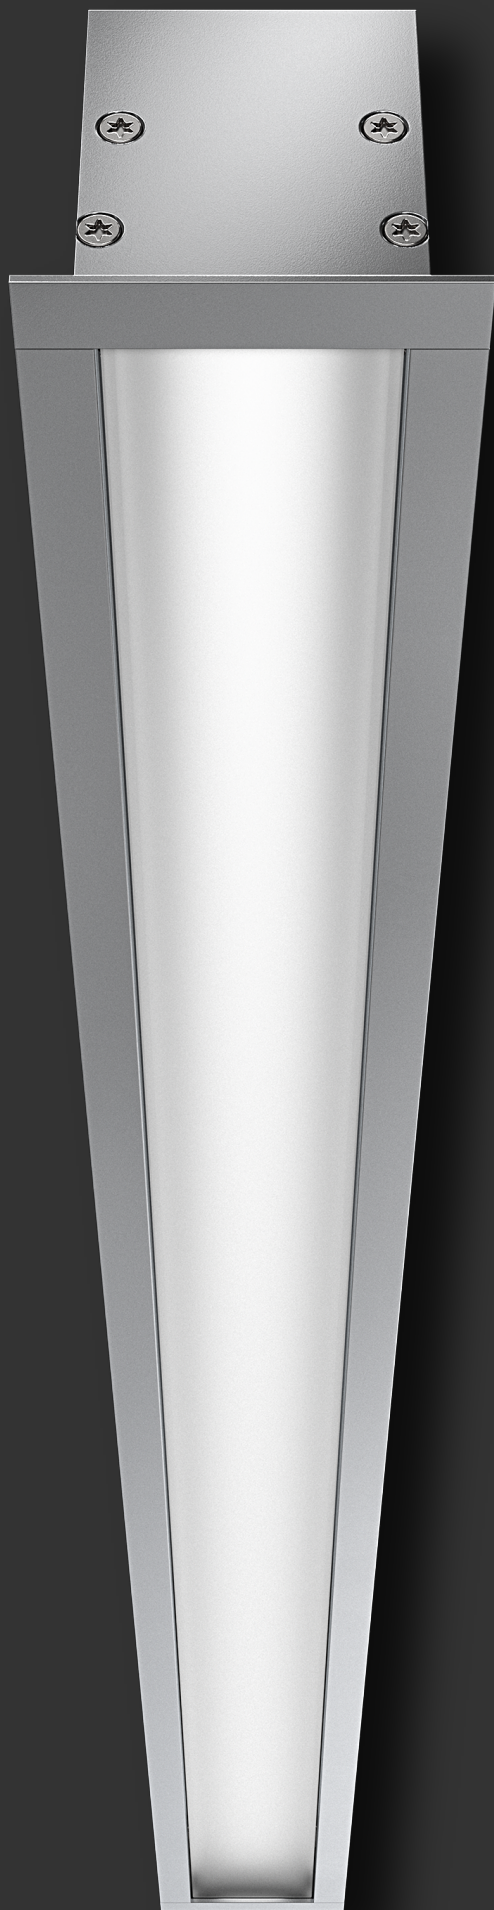

XERO
TECHNOLOGY
ADVANCED 

XTA | 2.0 Recessed IP55


metric

60mm Wide (inc flange 73mm)
75mm High

imperial

2.36" Wide (inc flanges
2.87") x 2.95" High



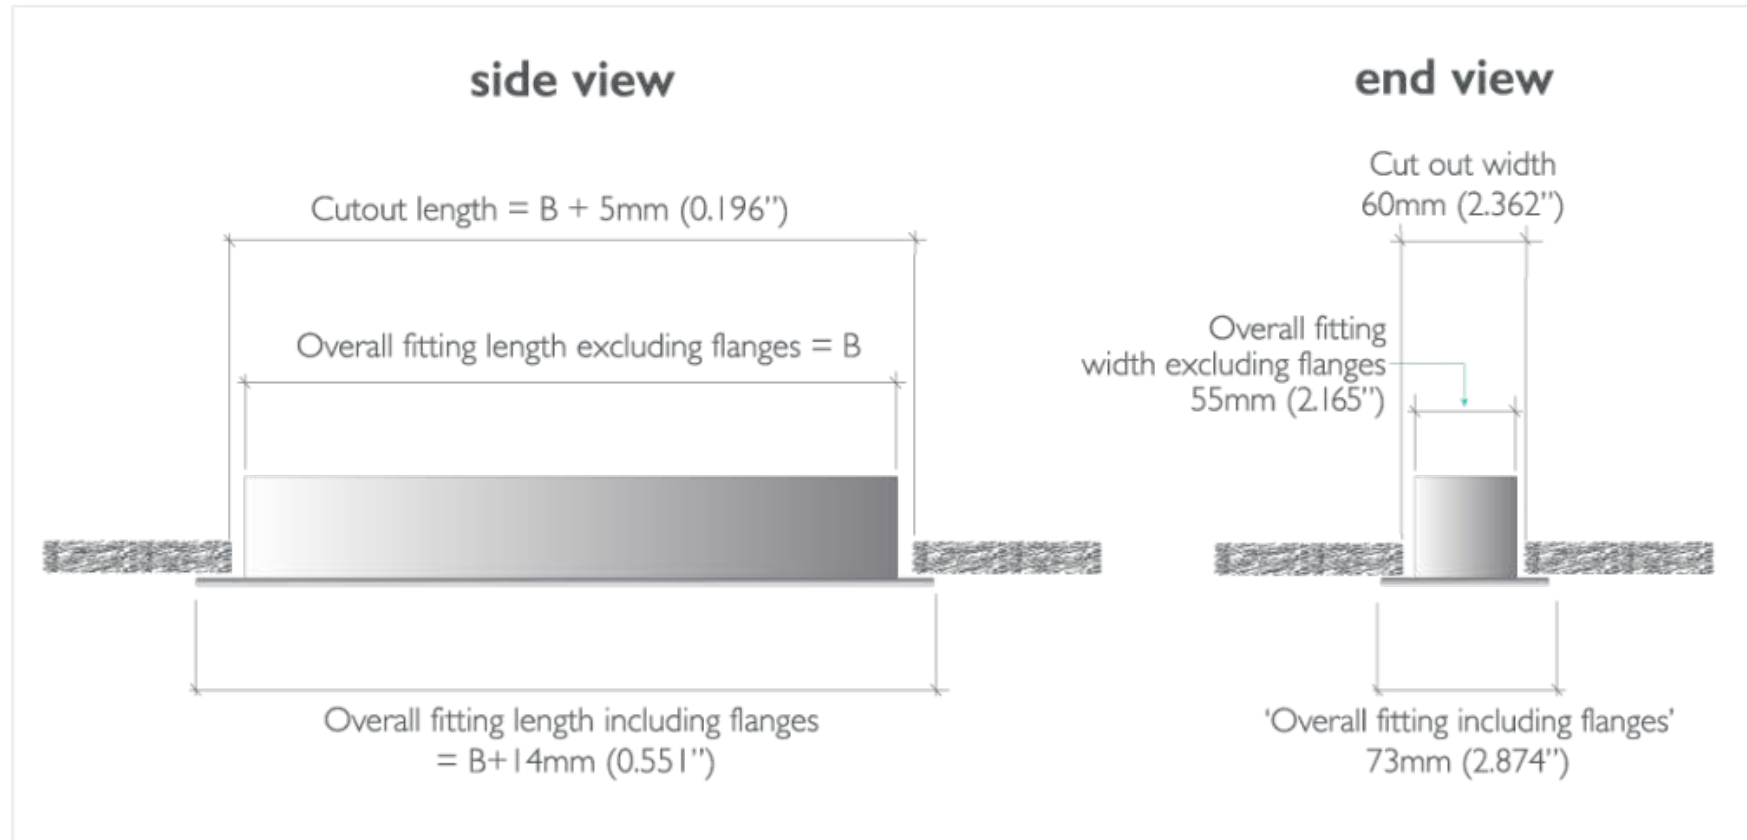


DATA TABLE


LED Engine	4ft Length 1120mm	Luminous Flux (Delivered Lumens)	LO 1900	HO 3500	
	Xeramix	CRI	80+		
		Lumen Maintenance:	114,000 Hours (L90 B10 @ 50°C)		
	Proformax	CRI:	90+		
		Lumen Maintenance:	82,000 Hours (L80 B10 @ 35°C)		
Warranty	Xeramix		10 years		
	Proformax		7 years		
Electrical	Power Consumption		Between 20 and 45w/m		
	Voltage input range		120 – 277V		
	Control methods		Dimming options for white light: 0-10V, DALI, DMX Optional RGB / Sunset Dimming control DMX or DALI XI		
	Total harmonic distortion THD		9.8% max		
	Approvals		UL / CE / CCC / AS:NZS / EMC		
Physical	Dimensions		60mm (inc flanges 73mm) X 75 mm high		
	Weight per metre		2.9kg (6.4lbs) average weight		
	Housing		Aluminium Extrusion with standard silver powder-coat, black or white textured, (or) optional selected powder-coated finish		
	Diffuser		Frosted acrylic lens / Polycarbonate lens / Microprism lens / Low glare UGR plexiglass		
	Connections		Polarised electrical connection between the gasket section joins		
	Compatible ceiling type		suitable for gyprock (drywall) ceilings, metal pan, concrete, timber, and T-bar grid ceilings		
	Mounting		Field adjustable rollerball wire suspensions / rod suspensions / wall mounting / surface mount		
	Joiner options		lit corner 90°/ Cross 90°/ Tee 90°/ Straight 180° Join		
	Operating temperatures		Xeramix = -25°C to 50°C (-13°F to 140°F) Proformax = -25°C to 35°C (-13°F to 95°F)		
	Environment		IP55 (Not in direct sunlight)		
	Minimum length adjustment		Xeramix = 1mm Proformax = 25mm		
	LED Board types		Xeramix LED boards in 25 / 100 / 280 / 560mm lengths Zhaga compatible Proformax LED boards in 50 / 280mm / 560mm lengths Zhaga compatible		

Optical control


All XTA profiles come with many diffuser options for glare control in any application



Low UGR Plexiglass



Plexiglass



Microprism




Polycarbonate

Accessories and options



sensors / daylight
harvesting



emergency packs



downlights

Bend options



135°



cross 90°



tee 90°



custom



corner 90°



ceiling to wall